


Ldrive 36W

WIRING

Connector Description

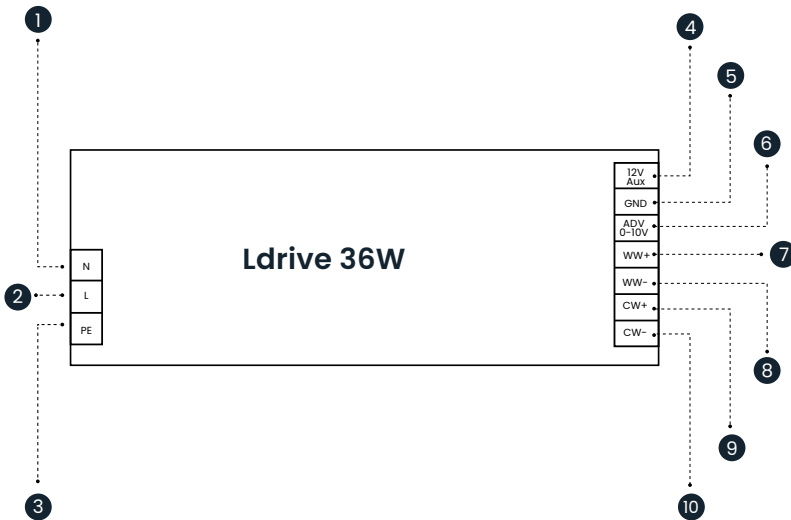

Pin	Symbol	Color	Description
1	N	White	AC Input Neutral
2	L	Black	AC Input Line
3	PE	Green	Earth
4	12V Aux	Yellow	12V Auxiliary Output
5	GND	Black	Common Ground
6	ADV (0-10V)	Blue	0-10V Sensor Input
7	WW+	Red	Warm White +
8	WW-	Black	Warm White -
9	CW+	Red	Cool White+
10	CW-	Black	Cool White-

Wiring

The wiring can be in stranded wires with ferrules or solid with a cross section of 15-18AWG(1.6-0.8mm²)(AC) and 20-22AWG(0.5-0.3mm²)(DC). Strip 8.5-9.5mm(0.33-0.37in) of insulation from the cables to ensure perfect operation of the push-wire terminals. Use one wire for each terminal connector.

120-277VAC 50/60Hz

