



# WIM2480


Bluetooth module for IoT



## Product Overview

The compact-sized BLE 5.2 module, designed for intelligent wireless controls, enables ultra-low power connectivity and provides considerable design flexibility to the engineers. WIM2480, with options for an external or a chip antenna, also has 18 General Purpose IO pins including, 6 PWM, ADC, I2C, UART, and SPI. High performance and efficiency is guaranteed with the 2 MB external flash.

## Block Diagram

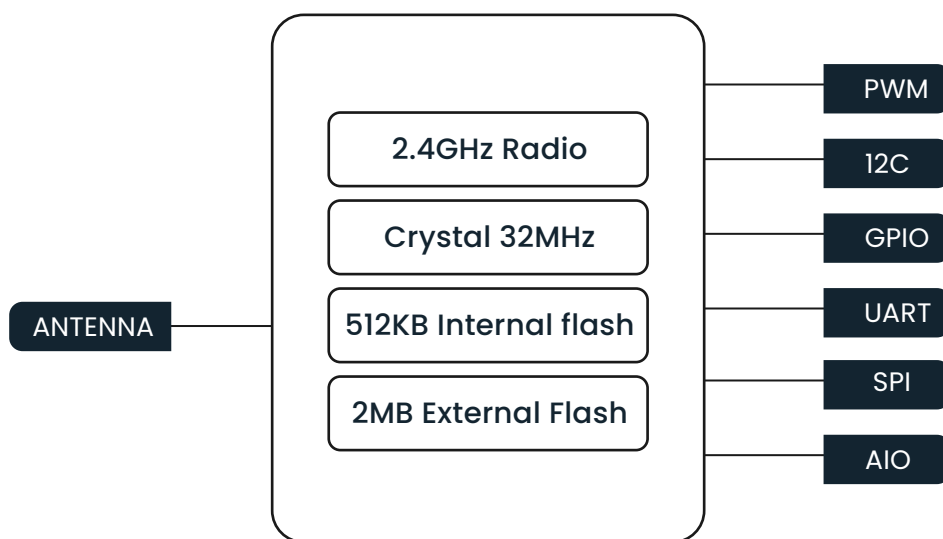

## Features

- BLE 5.2 based non-flooding intelligent mesh
- PWM/AIO/SPI/I2C/UART/IO interfaces
- 2MB external Flash for high performance
- TX output power up to +8dBm
- -92dBm RX sensitivity
- 18 programmable GPIOs
- 6 PWM channels
- Flexibility with external or chip antenna options
- Compact form factor
- Zero downtime Over-the-Air (OTA) firmware updates
- FCC, CE, ISED certified
- RoHS2.0 compliant

## Specifications

### Electrical specifications

| Specifications    | Value    |
|-------------------|----------|
| Input voltage     | 2.7-3.6V |
| IO supply voltage | -        |

### RF specifications

| Specifications       | Value        |
|----------------------|--------------|
| Operating frequency  | 2402-2480MHz |
| Maximum output power | 8dBm         |
| Receiver sensitivity | -92dBm       |

## ADC specifications

| Specifications    | Value    | Remarks     |
|-------------------|----------|-------------|
| ADC input voltage | 0.6–3.6V | @3.3V input |

## Current specifications

| Specifications     | Value       | Remarks |
|--------------------|-------------|---------|
| Deep sleep current | 1.5 $\mu$ A | @3V     |
| TX peak current    | 15.5mA      | @8dBm   |
| RX peak current    | 6.0mA       | @1Mbps  |

## Environmental specifications

| Specifications        | Value                       |
|-----------------------|-----------------------------|
| Operating temperature | -40 to 95°C (-40 to 203°F)  |
| Storage temperature   | -40 to 125°C (-40 to 257°F) |

## PWM specifications



| Specifications                 | Value         | Remarks                                |
|--------------------------------|---------------|--|
| PWM frequency                  | 0.1–1000kHz   | Up to 10kHz for low frequency PWM pins |
| Maximum voltage for logic low  | 0–0.4V        |  |
| Maximum voltage for logic high | VDD x 0.7–VDD |  |

## Mechanical



| Specifications | Value  | Remarks                             |
|----------------|--|-------------------------------------|
| Dimension      | 0.88 x 0.31 x 0.11in<br>(22.5 x 8.0 x 2.95mm)  | L x W x H<br>(For chip antenna)     |
| Dimension      | 0.65 x 0.31 x 0.09in<br>(16.60 x 8.0 x 2.41mm) | L x W x H<br>(For external antenna) |

## Module Dimensions

### External antenna version


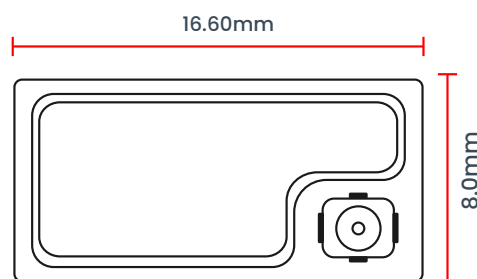


### Chip antenna version

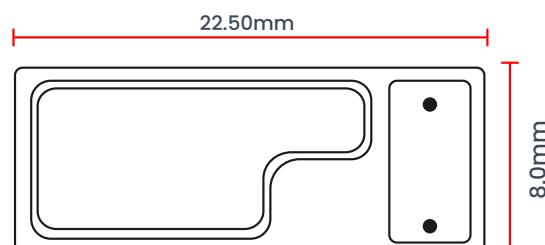


## Land Pattern Dimensions

All dimensions are in mm

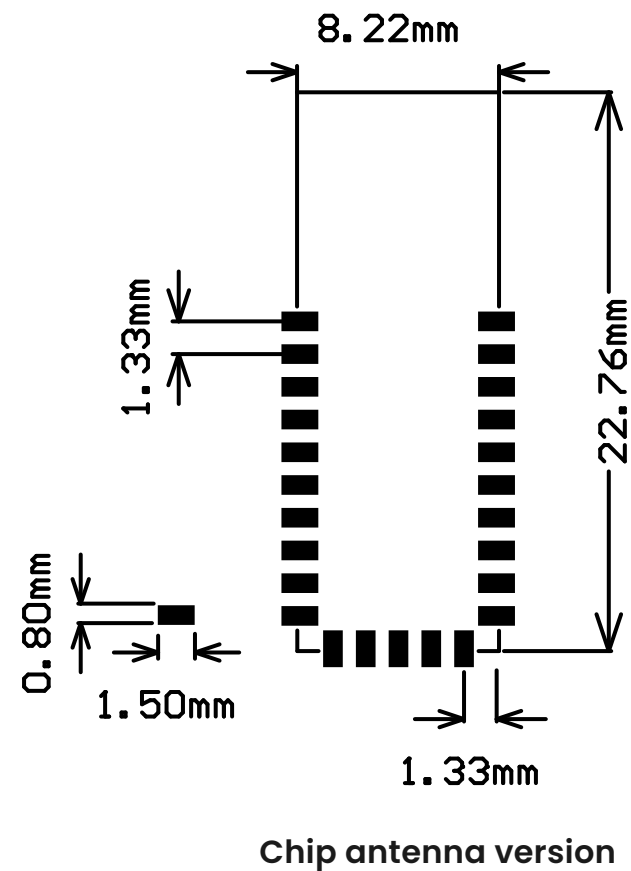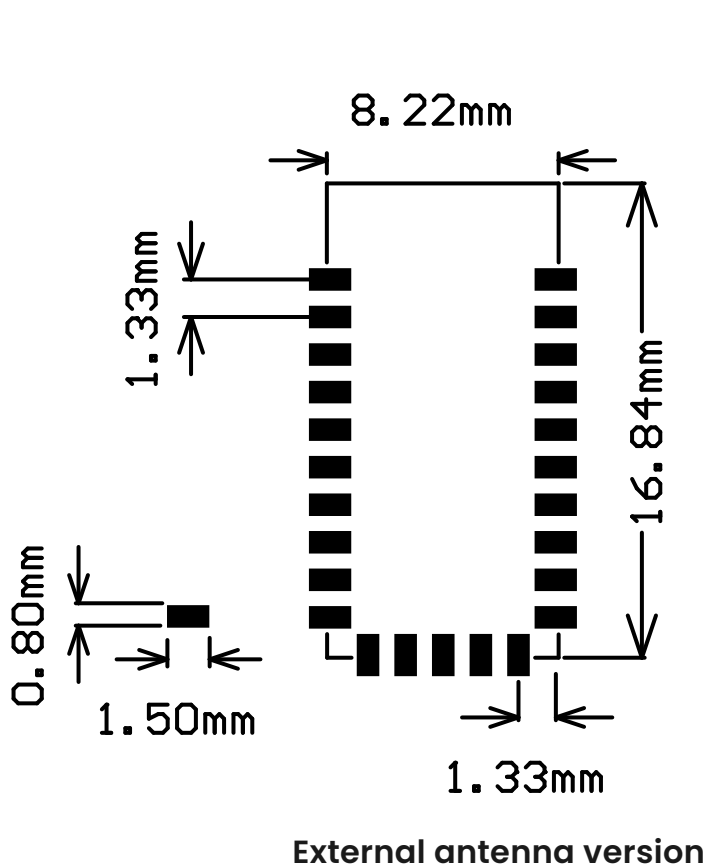

## Design Recommendations

- Keep out enough area for the chip antenna.
- Avoid any routing under antenna area as shown in the below image.
- Better to place the module away from High frequency circuitry like other RF, and large components or metallic objects.
- All GND pins must be well grounded.
- The area around the module should be free of any ground planes, power planes, trace routings or metal for 6mm from the module antenna position in all directions.
- Better not to route any traces underneath the module.
- The WIM2480 series modules contain highly sensitive electronic circuitry and are Electrostatic Sensitive Devices (ESD). Handling the WIM series modules without proper ESD protection may destroy or damage them permanently.

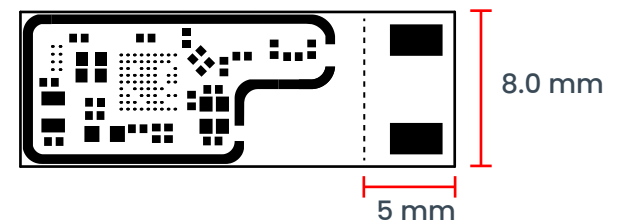

## Antenna Information

### 37mm wire antenna



|                 |               |
|-----------------|---------------|
| Frequency range | 2.4GHz-2.5GHz |
| Impedance       | 50Ω nominal   |
| VSWR            | 1.92:1 Max    |
| Return loss     | -10dB Max     |
| Gain(peak)      | 2dBi          |
| Cable loss      | 0.3dBi Max    |

### 100mm wire antenna



|                 |               |
|-----------------|---------------|
| Frequency range | 2.4GHz-2.5GHz |
| Impedance       | 50Ω nominal   |
| SWR             | ≤ 2.0         |
| Gain(Peak)      | 3dBi          |

### 600mm wire antenna



|                 |               |
|-----------------|---------------|
| Frequency range | 2.4GHz-2.5GHz |
| Impedance       | 50Ω nominal   |
| VSWR            | ≤ 1.3         |
| Gain(Peak)      | 3dBi          |

### Stick antenna




|                 |                 |
|-----------------|-----------------|
| Frequency range | 2.4GHz-2.5GHz   |
| Impedance       | 50Ω nominal     |
| VSWR            | 1.92:1 Max      |
| Return loss     | -10dB Max       |
| Gain(peak)      | 2dBi            |
| Cable loss      | 0.3dBi Max      |
| Polarization    | Linear Vertical |

### Chip antenna



|                   |                 |
|-------------------|-----------------|
| Frequency range   | 2.4GHz-2.5GHz   |
| Impedance         | 50Ω nominal     |
| VSWR              | <2:1            |
| Peak Gain         | 1.7 dBi         |
| Radiation pattern | Omnidirectional |
| Polarization      | Linear          |

## Pinout Details

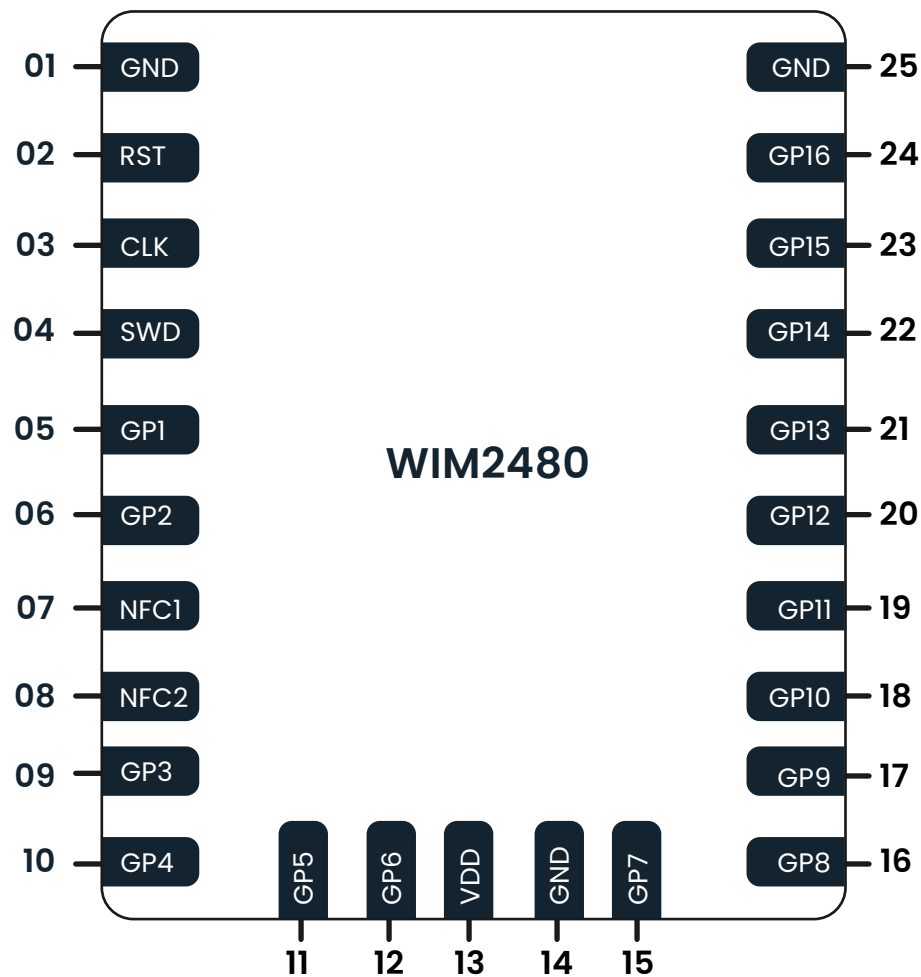

| Module Pin | Chip Pin | Name | Supporting Functions | Comments  |
|------------|----------|------|----------------------|---|
| 01         |          | GND  | GROUND               | Ground  |
| 02         | H4/P0.18 | RST  | RESET                | Reset   |
| 03         | H2       | CLK  | SWDCLK               | Serial wire debug clock input for debug and programming |
| 04         | J2       | SWD  | SWDIO                | Serial wire debug IO for debug and programming          |
| 05         | C8/P0.27 | GP1  | IO/PWM/I2C/SPI/UART  | PWM or Digital IO or Serial interface                   |
| 06         | F7/P0.13 | GP2  | IO/PWM/I2C/SPI/UART  | PWM or Digital IO or Serial interface                   |
| 07         | F2/P0.09 | NFC1 | NFC1/IO              | Digital IO (Low Freq)                                   |
| 08         | E2/P0.10 | NFC2 | NFC2/IO              | Digital IO (Low Freq)                                   |
| 09         | E7/P0.08 | GP3  | IO/PWM/I2C/SPI/UART  | PWM or Digital IO or Serial interface                   |

| Module Pin | Chip Pin | Name | Supporting Functions    | Comments                                     |
|------------|----------|------|-------------------------|--|
| 10         | D9/P0.05 | GP4  | IO/PWM/I2C/SPI/UART/AIO | AIO or Digital IO or PWM or Serial interface |
| 11         | J3/P0.22 | GP5  | IO/PWM/I2C/SPI/UART     | PWM or Digital IO or Serial interface        |
| 12         | J5/P0.17 | GP6  | IO/PWM/I2C/SPI/UART     | PWM or Digital IO or Serial interface        |
| 13         |          | VDD  | POWER                   |  |
| 14         |          | GND  | GROUND                  |  |
| 15         | A4/P0.03 | GP7  | IO/PWM/AIO              | AIO or Digital IO or PWM (upto 10KHz)        |
| 16         | A3/P0.25 | GP8  | IO/PWM                  | Digital IO or PWM (upto 10KHz)               |
| 17         | B4/P1.03 | GP9  | IO/PWM                  | Digital IO or PWM (upto 10KHz)               |
| 18         | C6/P0.02 | GP10 | IO/PWM/AIO              | AIO or Digital IO or PWM (upto 10KHz)        |
| 19         | C4/P1.05 | GP11 | IO/PWM                  | Digital IO or PWM (upto 10KHz)               |
| 20         | C5/P0.19 | GP12 | IO/PWM                  | Digital IO or PWM (upto 10KHz)               |
| 21         | A5/P0.29 | GP13 | IO/PWM/AIO              | AIO or Digital IO or PWM (upto 10KHz)        |
| 22         | E9/P0.06 | GP14 | IO/PWM                  | PWM/ Digital IO                              |
| 23         | C9/P0.26 | GP15 | IO/PWM/I2C/SPI/UART     | PWM or Digital IO or Serial interface        |
| 24         | F9/P1.08 | GP16 | IO/PWM/I2C/SPI/UART     | PWM or Digital IO or Serial interface        |
| 25         |          | GND  | GROUND                  | Ground                                       |

**Note:** If SPI is used with 8 Mbps data rate, the recommended GPIOs for the clock signal (SCK) are GP1, and GP16


## Firmware Pin Assignment

| Profile Type<br>PIN DETAILS | Intensity         | Intensity,<br>CCT | Relay On/off, Analog<br>input and dual channel output | DALI    |
|-----------------------------|-------------------|-------------------|---|---------|
| Pin                         | 24 (GP16)         | 23 (GP15)         | 8 (NFC2)  | 5 (GP1) |
| Functionality               | Intensity channel | Cool channel      | Relay PIO   | DALI-   |
| Pin                         |                   | 24 (GP16)         | 6 (GP2)   | 6 (GP2) |
| Functionality               |                   | Warm channel      | Color temperature channel                             | DALI+   |
| Pin                         |                   |                   | 5 (GP1)   |         |
| Functionality               |                   |                   | Intensity channel                                     |         |
| Pin                         |                   |                   | 15 (GP7)  |         |
| Functionality               |                   |                   | Analog input channel                                  |         |

| Profile Type<br>PIN DETAILS | Sensor                    | RGB, CCT,<br>Intensity | UART     | Analog dual channel input and output |
|-----------------------------|---------------------------|------------------------|----------|--------------------------------------|
| Pin                         | 24 (GP16)                 | 5 (GP1)                | 10 (GP4) | 23 (GP15)                            |
| Functionality               | Sensor trigger PIO        | Red channel            | UART TX  | Color temperature channel/ Relay     |
| Pin                         | 11 (GP5)                  | 6 (GP2)                | 9 (GP3)  | 24 (GP16)                            |
| Functionality               | Sensor data communication | Green channel          | UART RX  | Intensity channel                    |
| Pin                         | 12 (GP6)                  | 10 (GP4)               |          | 18 (GP10)                            |
| Functionality               | Sensor data communication | Blue channel           |          | Analog input channel 1               |
| Pin                         |                           | 23 (GP15)              |          | 21 (GP13)                            |
| Functionality               |                           | Cool channel           |          | Analog input channel 2               |
| Pin                         |                           | 24 (GP16)              |          |                                      |
| Functionality               |                           | Warm channel           |          |                                      |


## Application Circuit Diagrams

### ▪ Schematic for RGB, CCT, intensity control

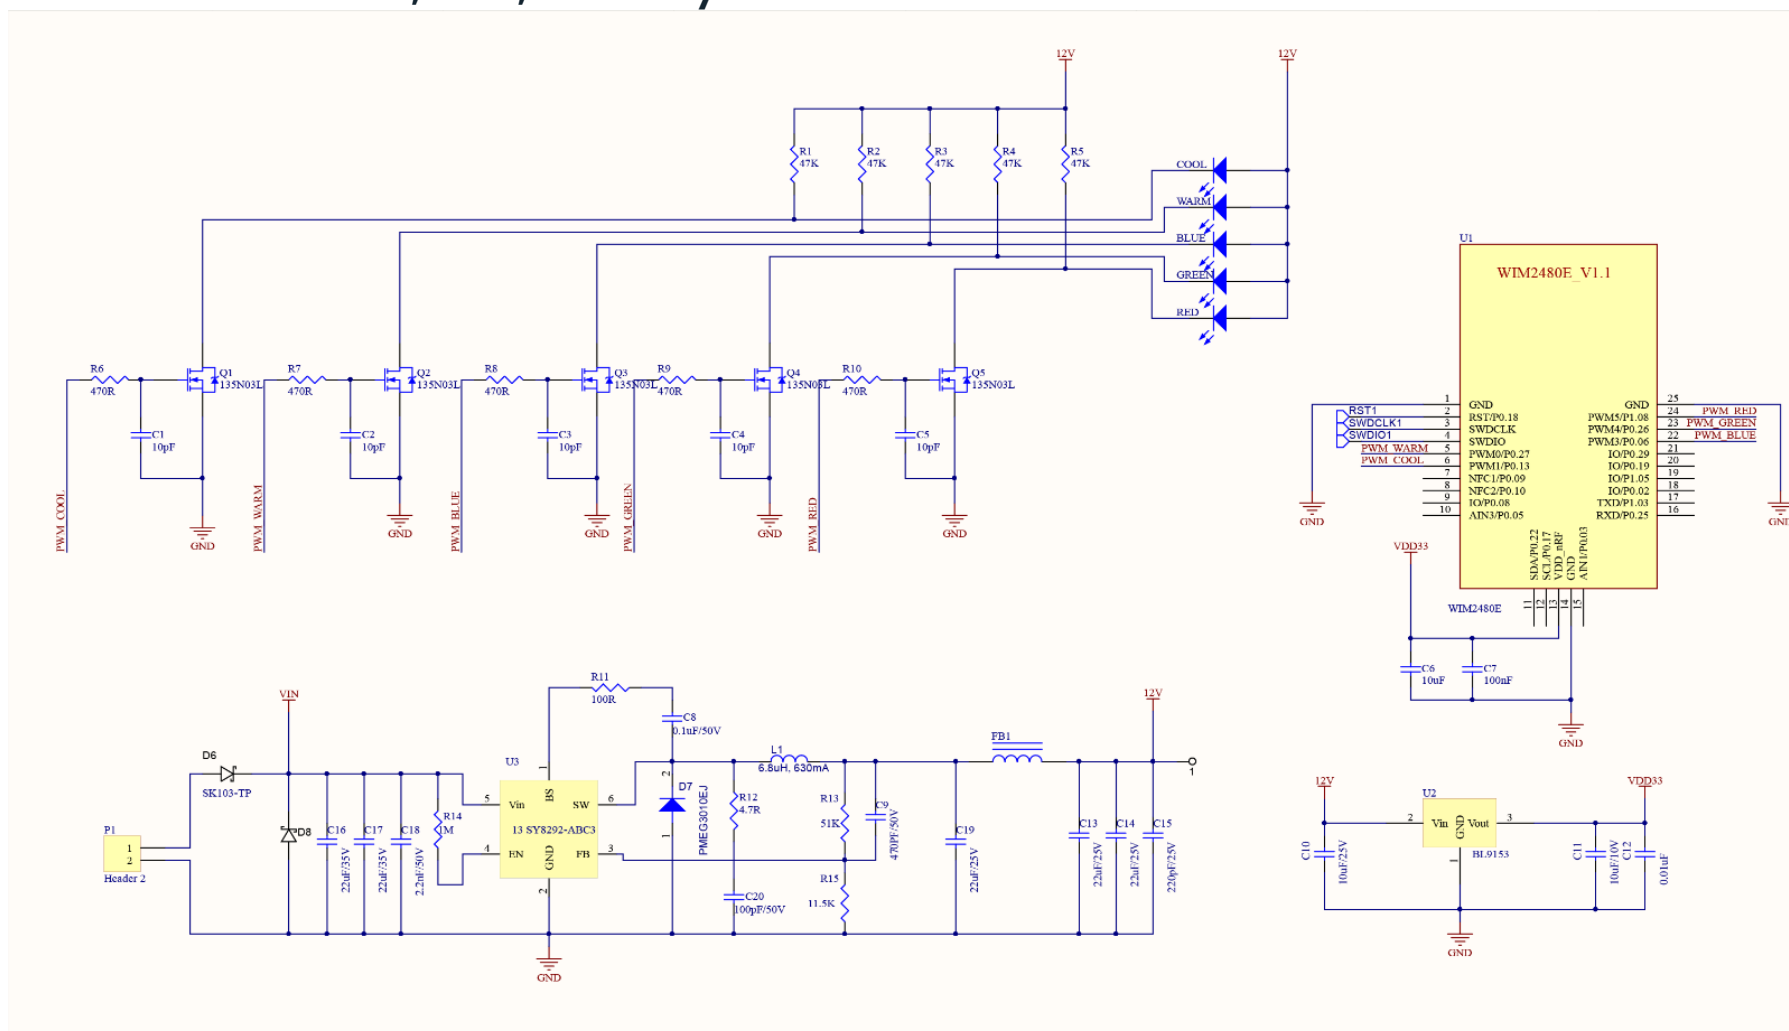




## ■ Schematic for dual channel analog 0-10V output

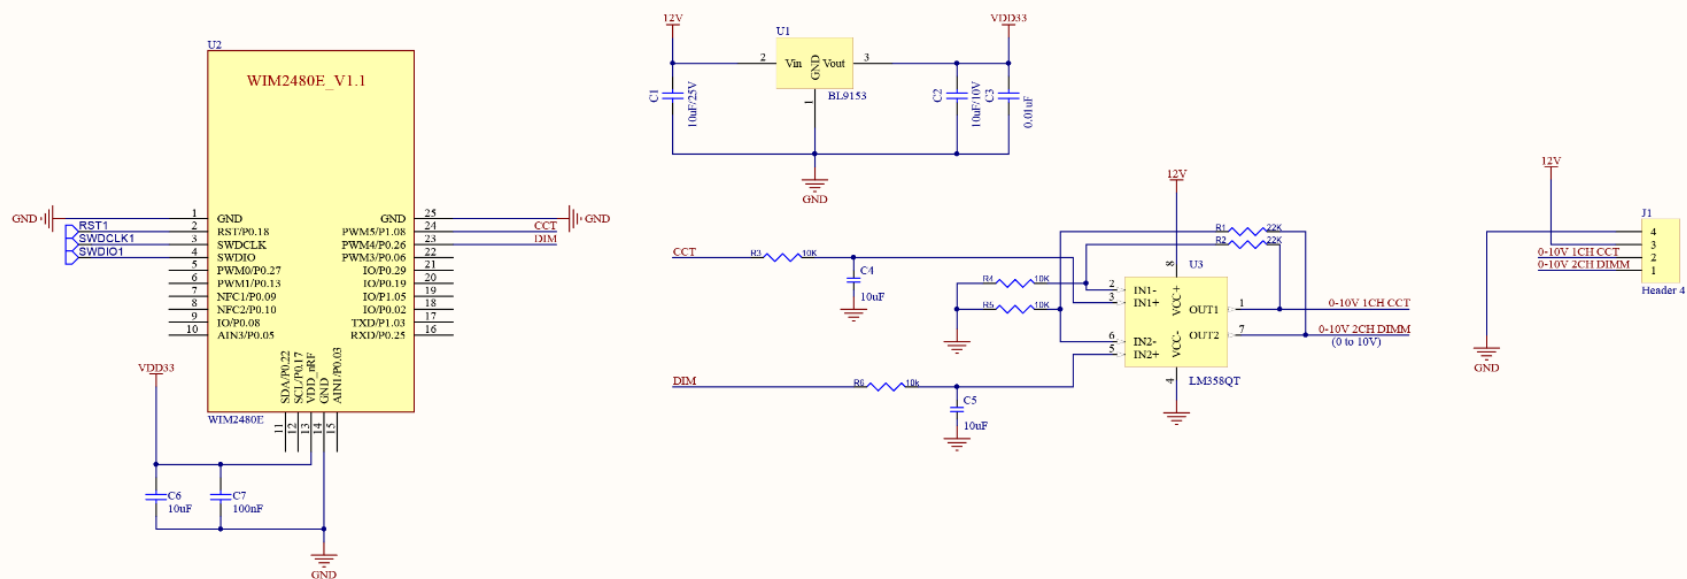


## ■ Schematic for AC power monitoring

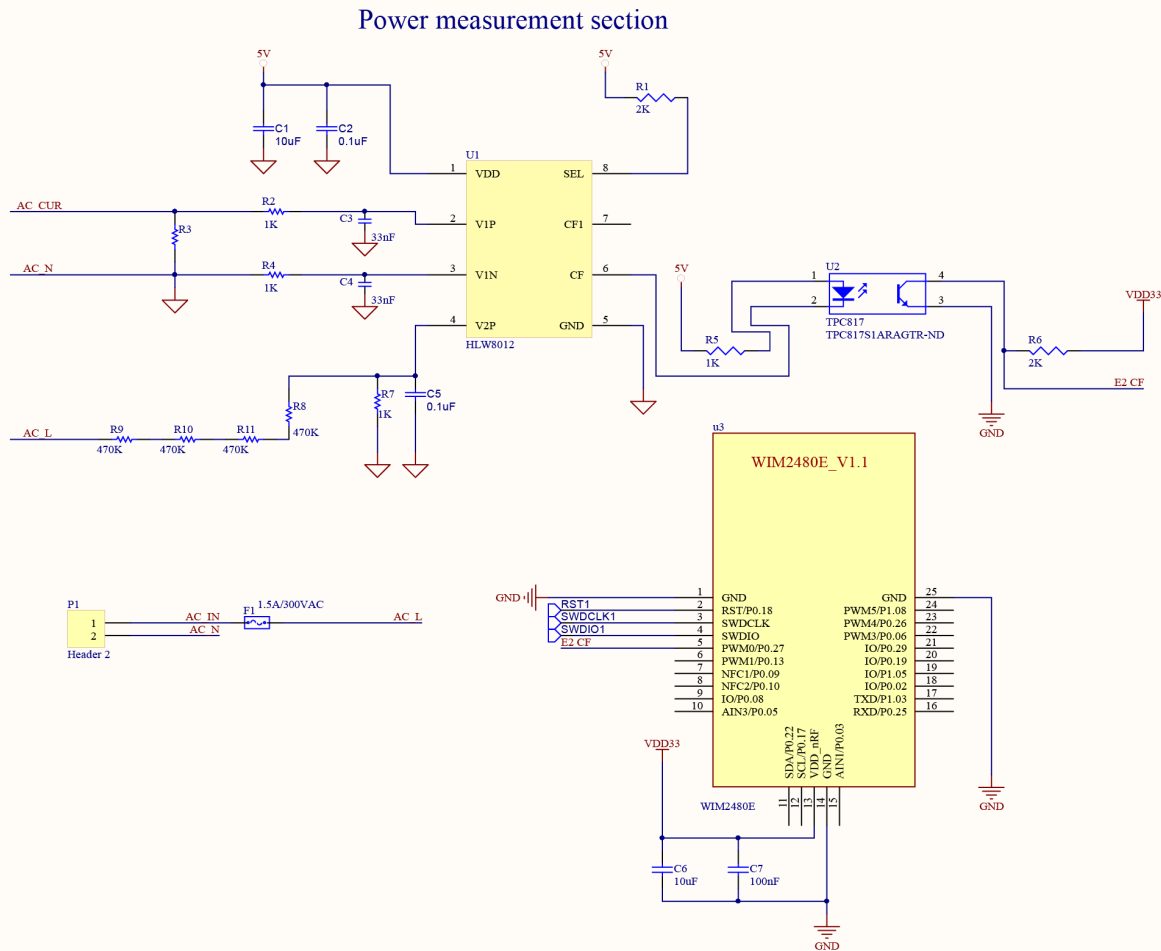


## ▪ Schematic for smart sensor interfacing





PIR SENSOR




COLOR SENSOR

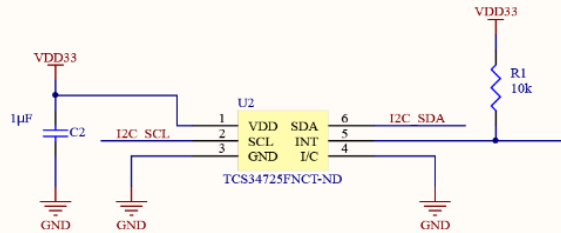


HUMIDITY AND TEMPERATURE SENSOR

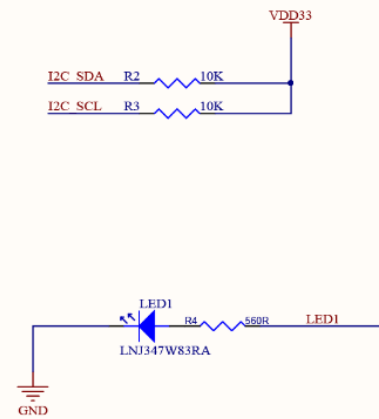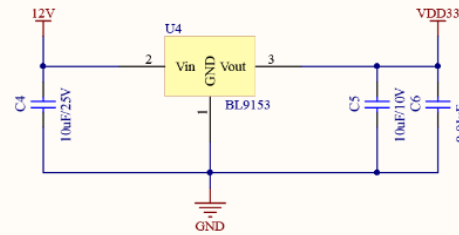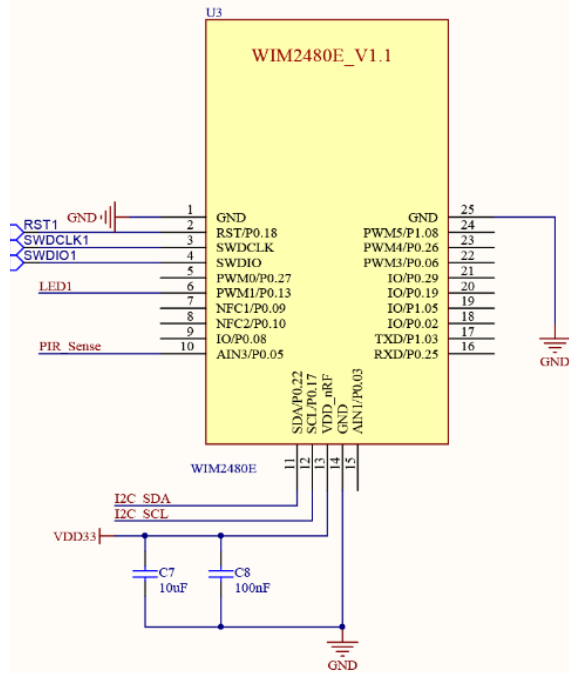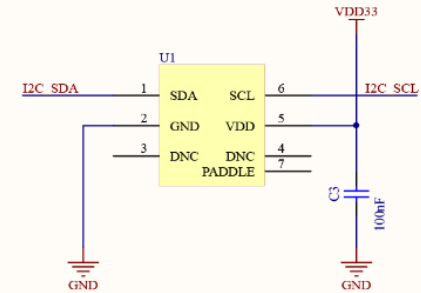

## ■ Schematic for smart switch

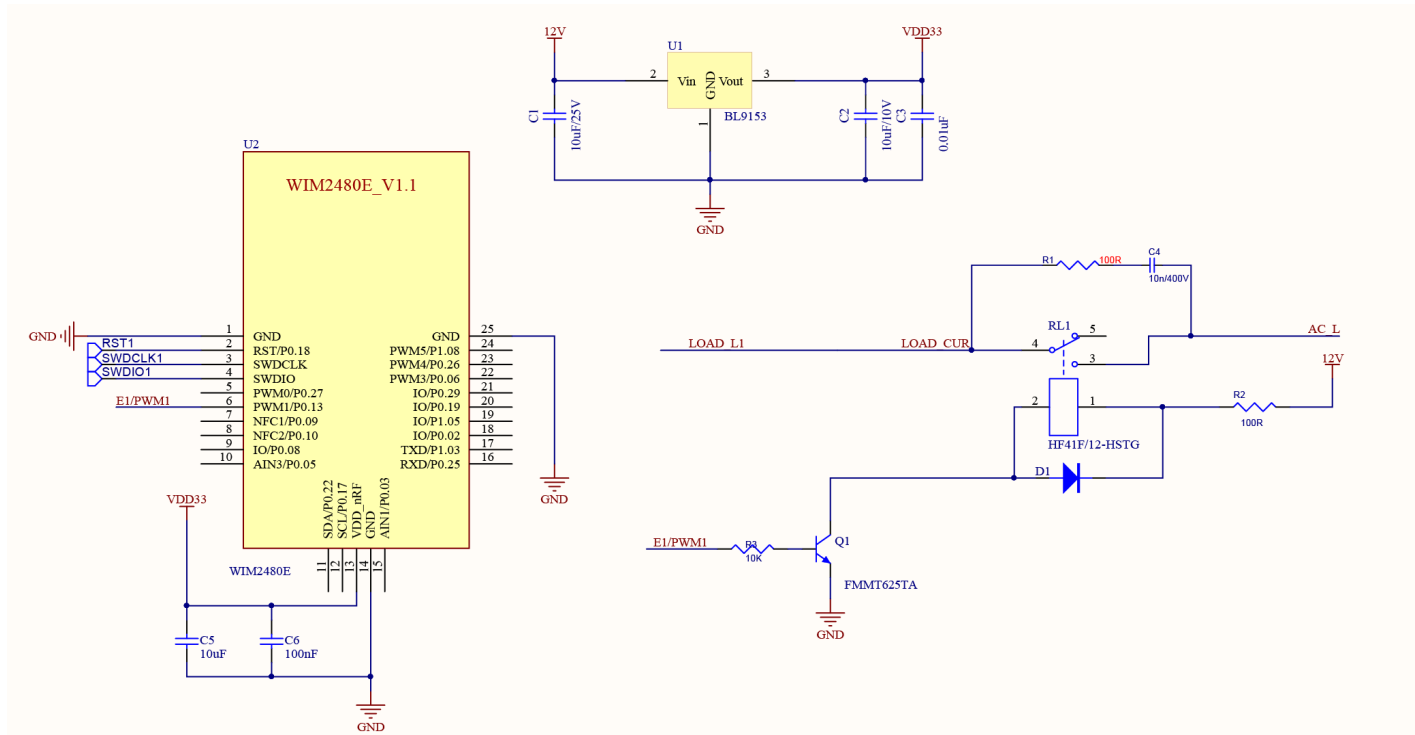


## ■ Schematic for Warm Cool LED control

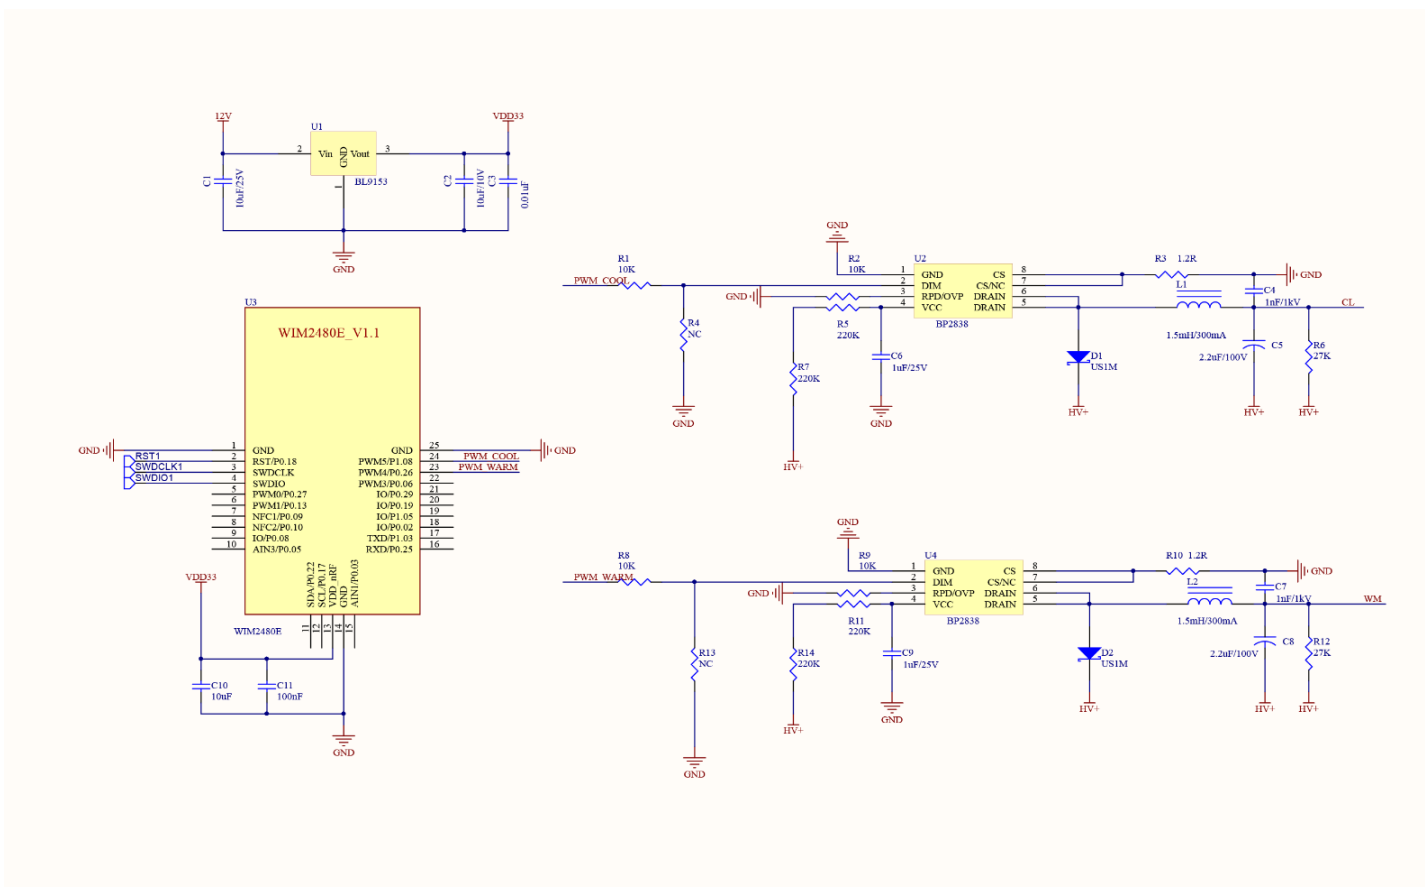

# Soldering Information

## Leadfree reflow soldering

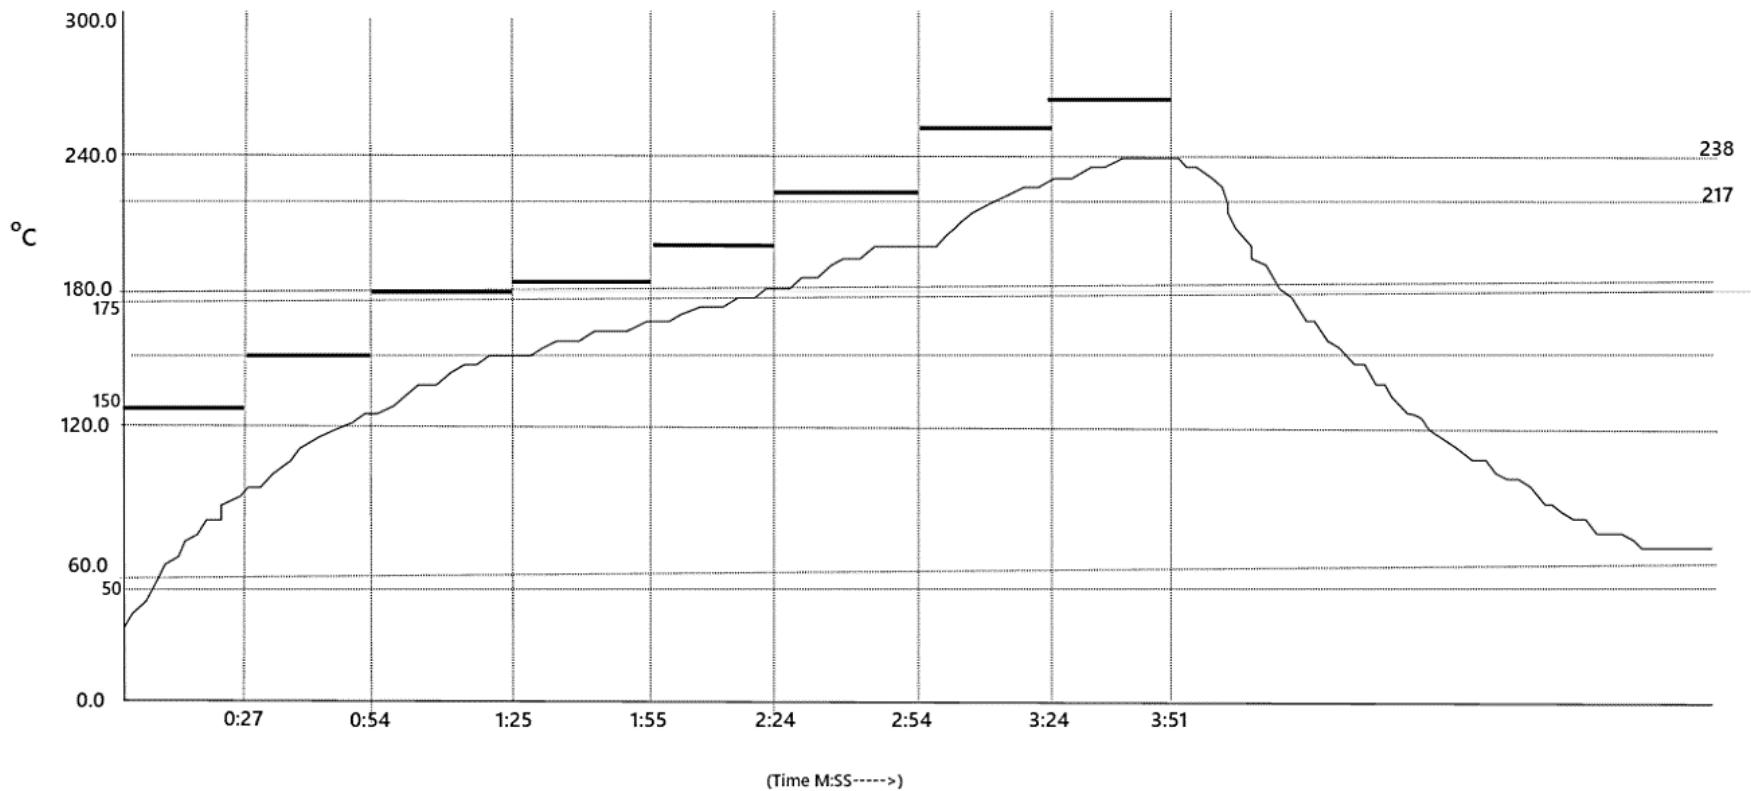

## Don'ts

### Cleaning



In general, cleaning the populated modules is strongly discouraged. Residuals under the module cannot be easily removed with any cleaning process.

- Cleaning with water can lead to capillary effects where water is absorbed into the gap between the host board and the module. The combination of soldering flux residuals and encapsulated water could lead to short circuits between neighboring pads. Water could also damage any stickers or labels.
- Cleaning with alcohol or a similar organic solvent will likely flood soldering flux residuals into the RF shield, which is not accessible for post-washing inspection. The solvent could also damage any stickers or labels.


# Packaging Information


## Tape Dimensions

All dimensions are in mm

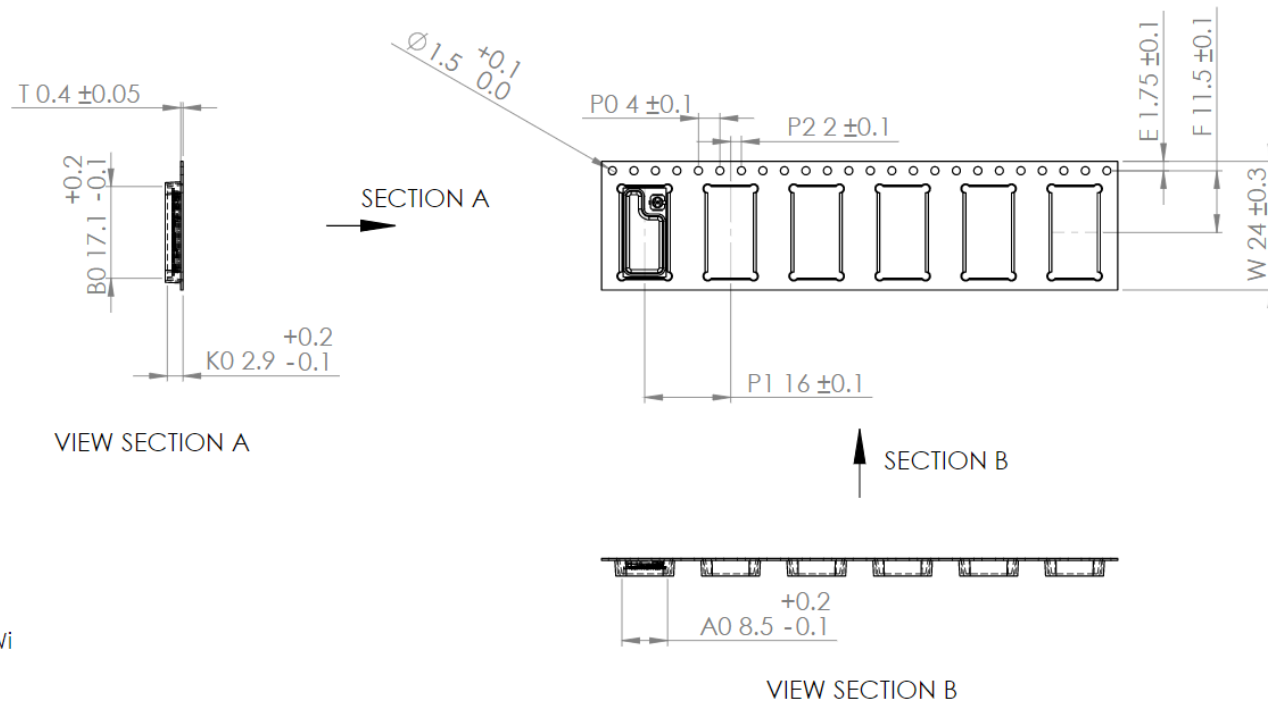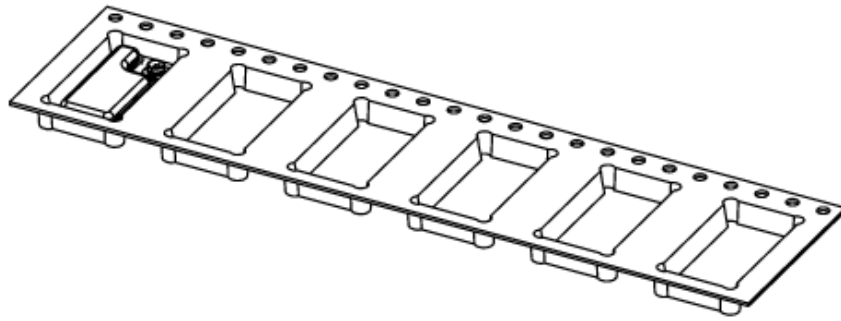

## Direction of Feed

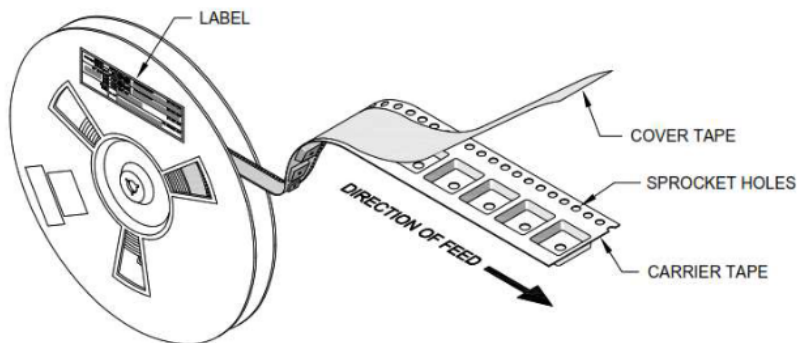


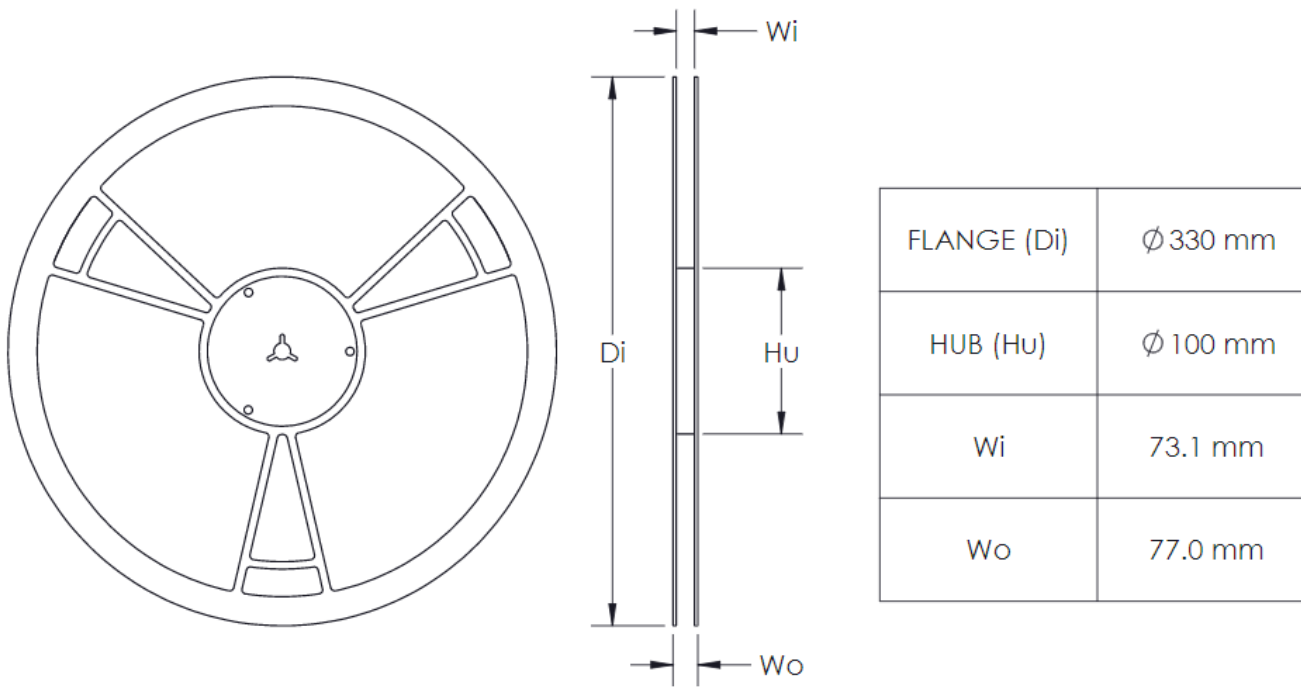


**A full reel can hold 1000 modules and weighs approximately 1100 gm (including the modules). The module antennas are packed separately and supplied along with the modules.**

- Tape material: Conductive Polystyrene; Black; 0.4mm thickness
- All tape and sprocket hole dimensioning are as per EIA-481 unless otherwise stated
- Order volume less than a full reel will be supplied on cut tape (without a reel)


### Packaging hierarchy

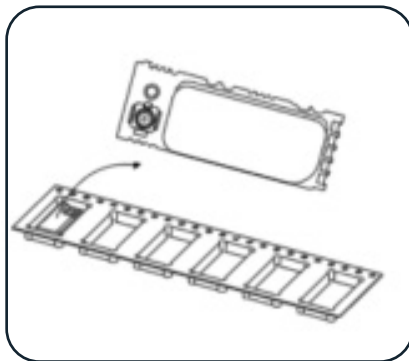


**Modules on Tape**

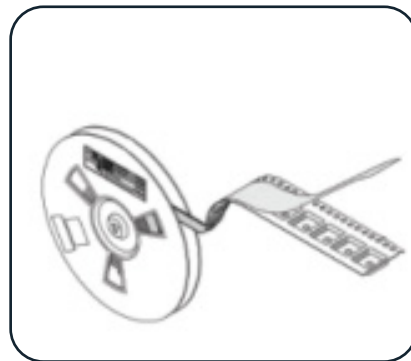

**Tape on Reel**

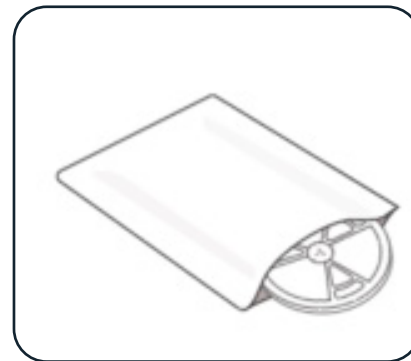

**ESD Safe Cover**

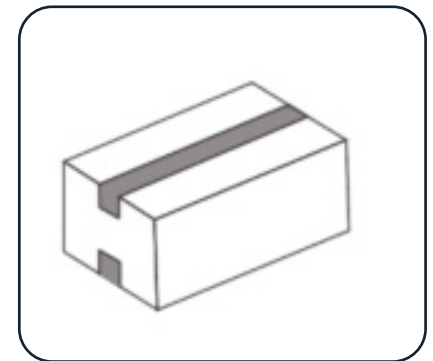

**Master Carton**

## Certifications

| Certifications | Details   |
|----------------|---|
| CE             | Article 3, RED 2014/53/EU<br>EMC test standards : ETSI EN 301 489-1 V2.2.3 (2019-11)<br>ETSI EN 301 489-17 V3.2.4 (2020-09)<br>EN 55032: 2015<br>EN 55035: 2017<br>Radio test standard : ETSI EN 300 328 V2.2.2 (2019-07)<br>Health test standard : EN 50663: 2017<br>Safety test standard : IEC 62368-1:2014 |
| FCC            | FCC Rule Part 15C, ID: 2AG4N-WIM2480  |
| ISED           | Cert No: 25222-WIM2480  |
| RoHS 2.0       | RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU  |

## Ordering Information

| Product Code | Communication | Voltage Rating | Analog Channel I/O | PWM I/O    | Serial Interface | Dimensions (mm)                                | Antenna  |
|--------------|---------------|----------------|--------------------|------------|------------------|--|----------|
| WIM2480E     | BLE 5.2       | 3.0VDC         | 4 AIO              | 6 Channels | UART/SPI/I2C     | 0.88 x 0.31 x 0.11in<br>(22.5 x 8.0 x 2.95mm)  | External |
| WIM2480C     | BLE 5.2       | 3.0VDC         | 4 AIO              | 6 Channels | UART/SPI/I2C     | 0.65 x 0.31 x 0.09in<br>(16.60 x 8.0 x 2.41mm) | Chip     |



### Precautions

- While integrating module, make sure all the pads are soldered properly.
- Please use a voltage regulator if the power supply is above the max ratings.
- For best wireless signals, please avoid packing the antenna close to metal parts or cases.
- Stresses above the listed maximum ratings may cause permanent damage to the device

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by WiSilica Inc. is under license. Other trademarks and trade names are those of their respective owners.



20321 Lake Forest Dr D6,  
Lake Forest, CA 92630

 [www.lumoscontrols.com](http://www.lumoscontrols.com)  
 +1 949-397-9330