



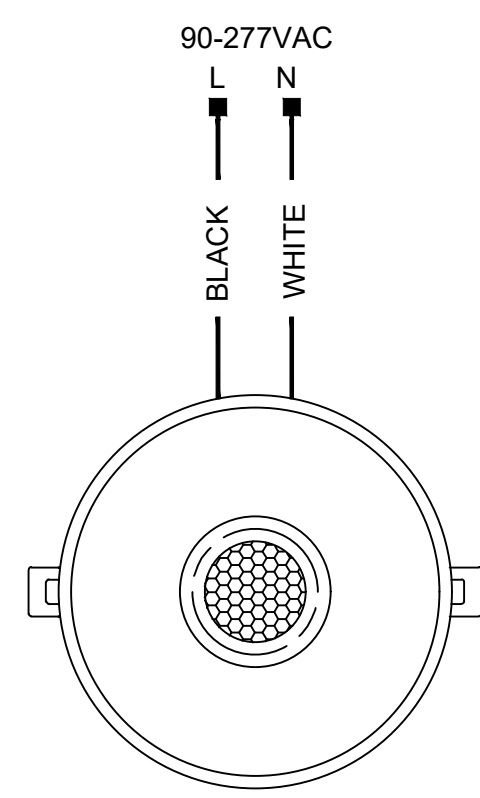


CYRUS AP

WIRELESS PIR OCCUPANCY AND DAYLIGHT SENSOR
90-277 VAC INPUT
DEVICE SUPPORTS SURFACE AND CEILING MOUNTING WITH HIGH-BAY AND LOW BAY LENS OPTIONS.

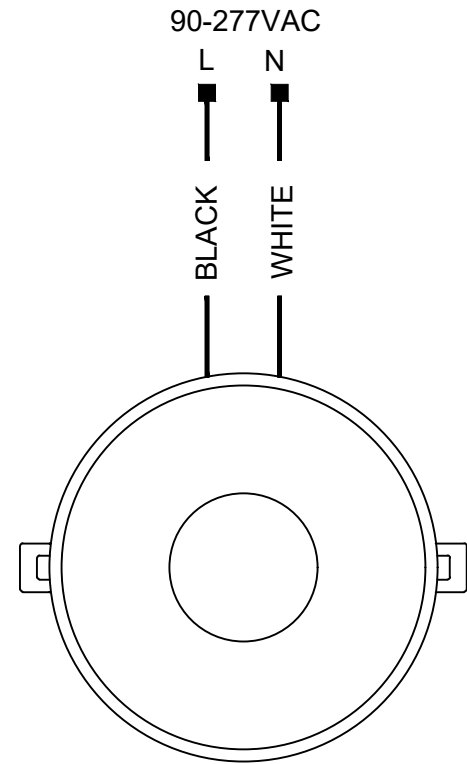


CYRUS AM

WIRELESS MICROWAVE OCCUPANCY AND DAYLIGHT SENSOR
90-277 VAC INPUT
DEVICE SUPPORTS SURFACE AND CEILING MOUNTING WITH OPTIONS.

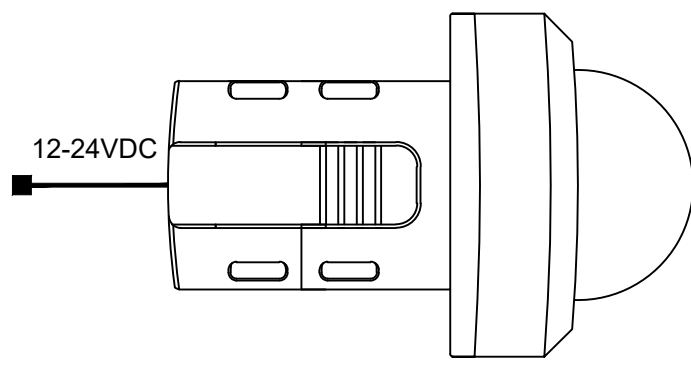


CYRUS F

FIXTURE MOUNTING SENSOR WITH DUAL-CHANNEL
0-10 V LIGHTING CONTROLLER
12-24 VDC INPUT
PIR OCCUPANCY AND AMBIENT LIGHT SENSING

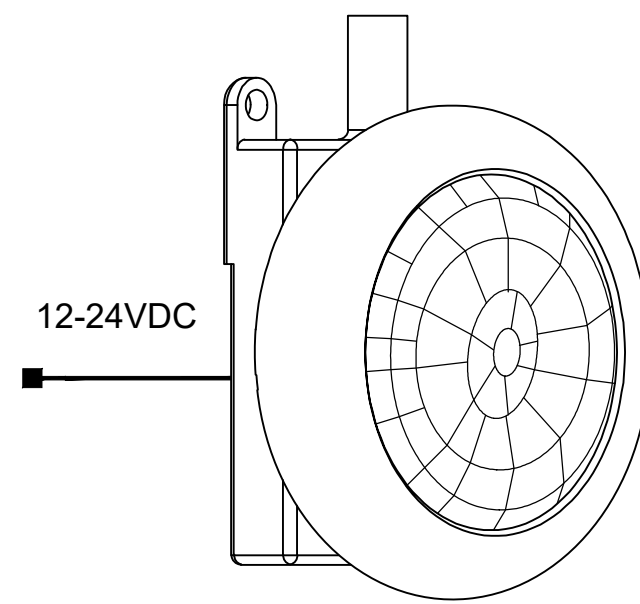


PSC-BL-I-FM-DCO-BLE-WS

FIXTURE-MOUNTED PIR SENSOR WITH SINGLE-CHANNEL 0-10 V LIGHTING CONTROLLER
12-24 VDC INPUT
PIR MOTION DETECTION
DEVICE SUPPORTS CEILING OR FIXTURE MOUNTING AT HEIGHTS UP TO 40 FT.

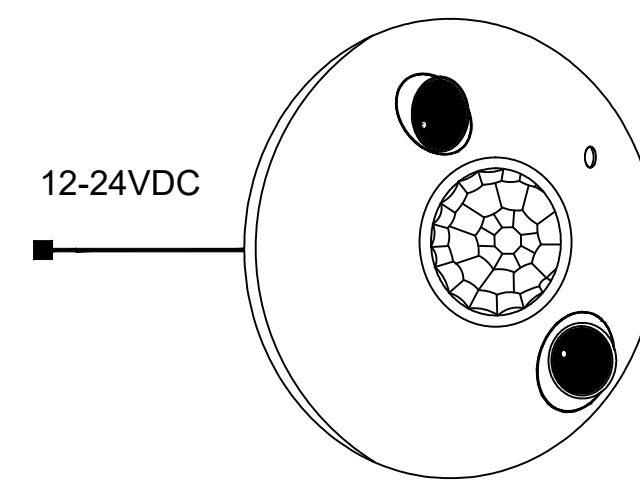


PSC-BL-D-CM-DC-BLE-WS

WIRELESS DUAL TECHNOLOGY CEILING-MOUNTED OCCUPANCY SENSOR
12-24 VDC INPUT
PIR AND ULTRASONIC MOTION DETECTION
CEILING OR SURFACE MOUNTING AT HEIGHTS UP TO 12 FT.

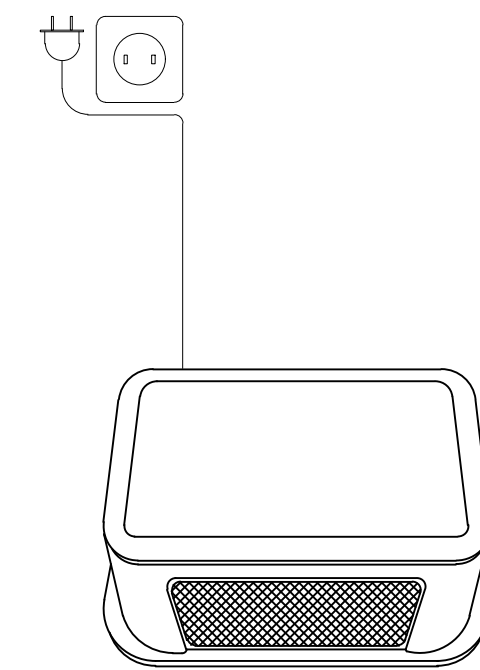


CYRUS AQ

WIRELESS INDOOR AIR-QUALITY SENSOR
5 VDC MINI-USB INPUT
DEVICE PROVIDES REAL-TIME MONITORING OF TEMPERATURE, RELATIVE HUMIDITY, CO2, PM1.0, PM 2.5, PM10, TVOC, AND AIR QUALITY INDEX (AQI).

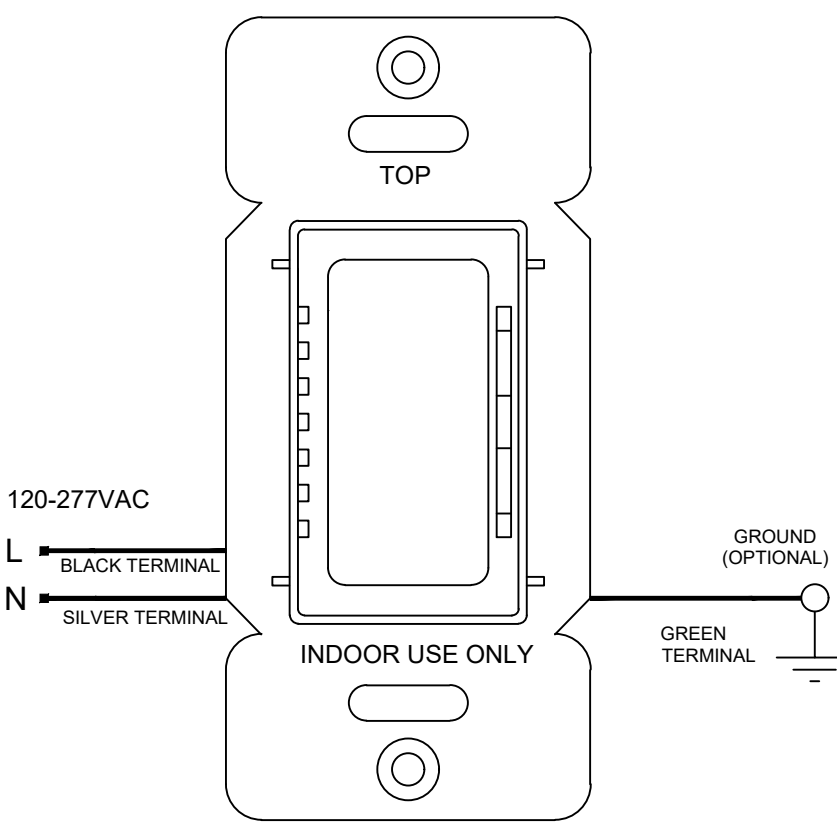


PSC-DM-WS-100-BLE-WS

WIRELESS WALL-MOUNTED DIMMER SWITCH
120-277 VAC INPUT

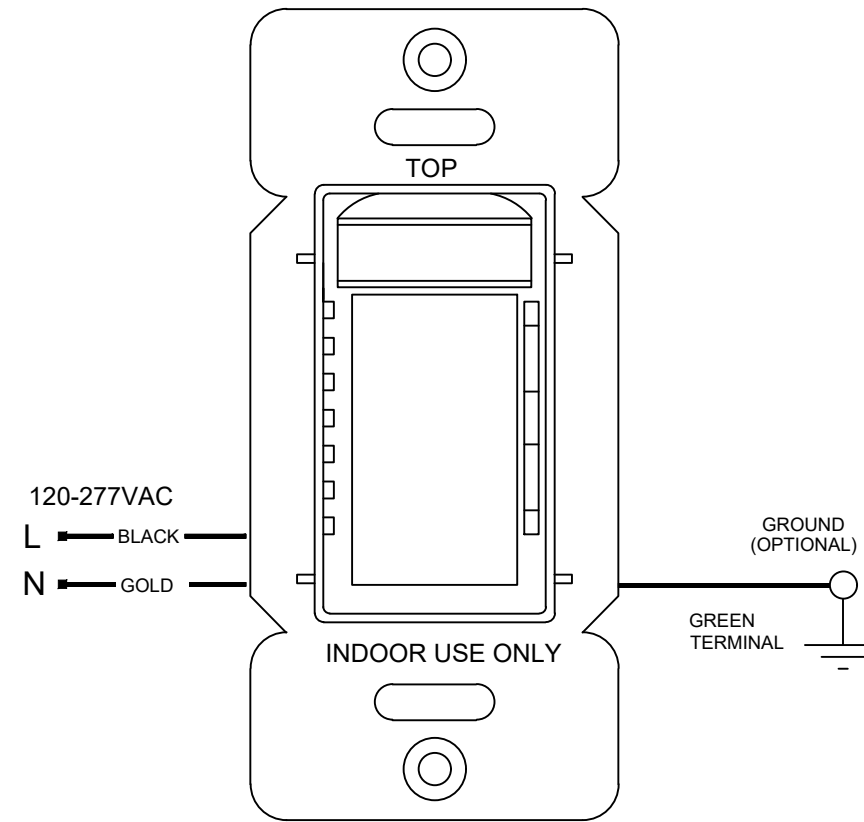


PSC-DM-I-WS-100-BLE-WS

WIRELESS WALL-MOUNTED PIR SENSOR AND DIMMER SWITCH
120-277 VAC INPUT

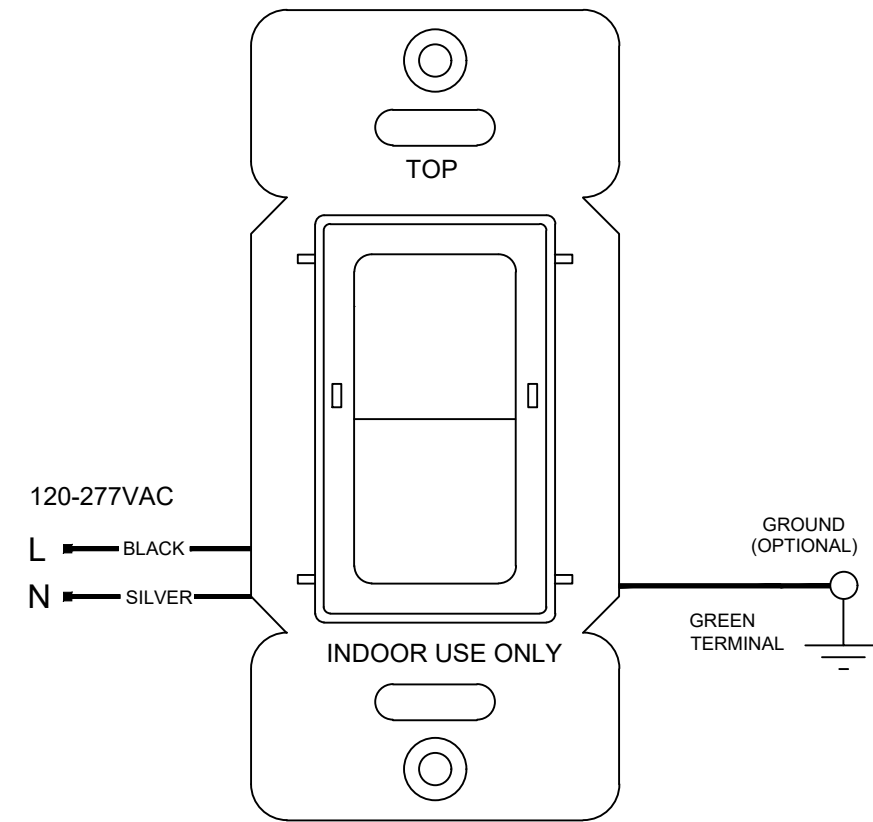


PSC-DM-WS-200-BLE-WS

WIRELESS WALL-MOUNTED 2 BUTTON MESH WALL CONTROLLER
120-277 VAC INPUT

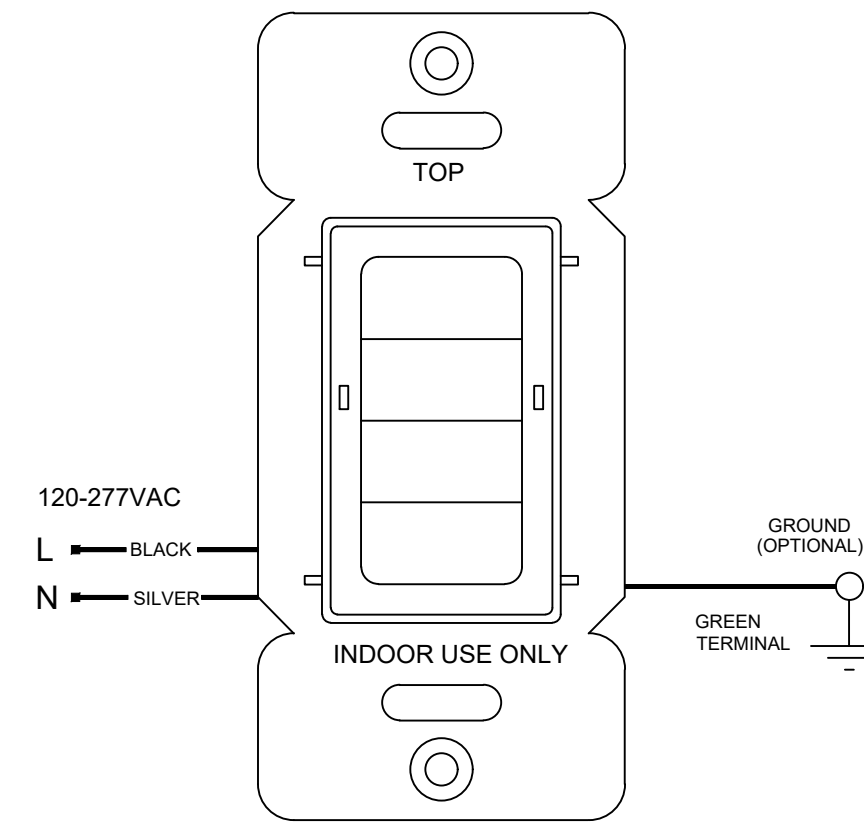


PSC-DM-WS-400-BLE-WS

WIRELESS WALL-MOUNTED 4 BUTTON MESH WALL CONTROLLER
120-277 VAC INPUT

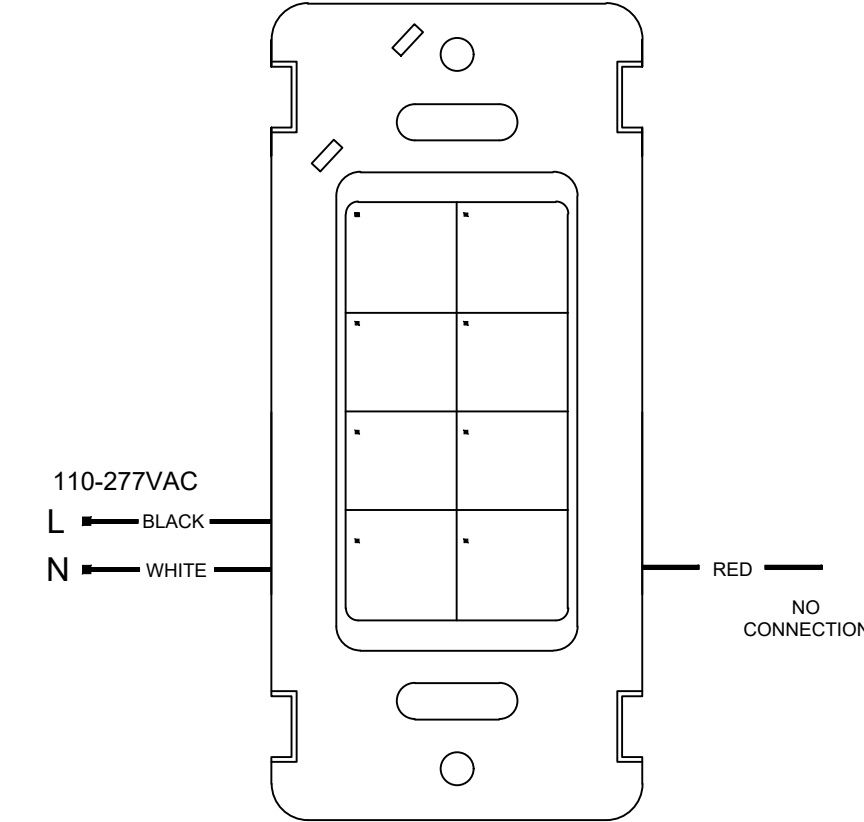


WS-NA0-02-08W

WIRELESS WALL-MOUNTED 8 BUTTON BLE CONTROLLER
110-277 VAC INPUT

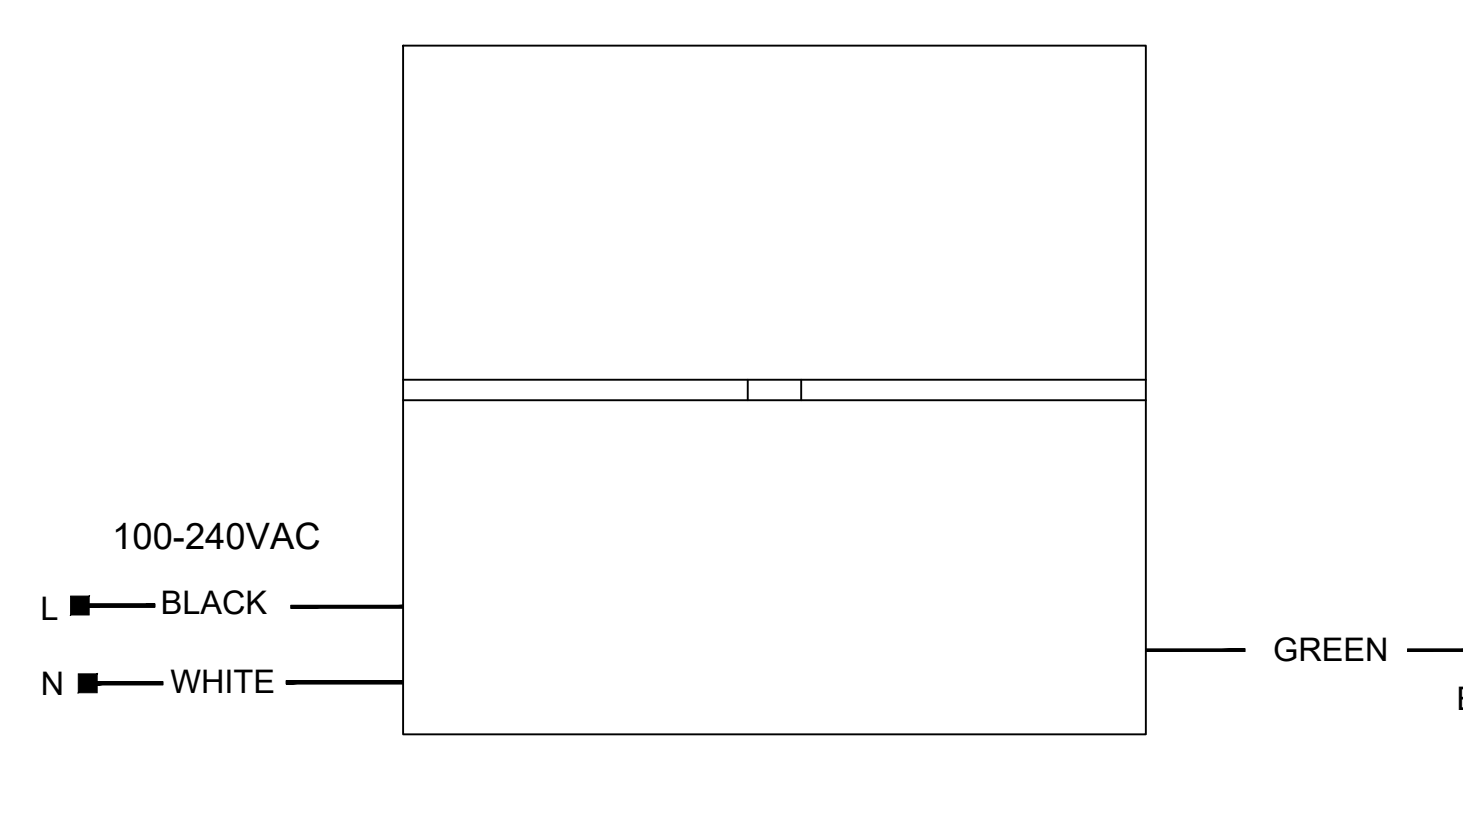


CARTON AC 4B/8B PANEL

WIRELESS AC-POWERED 4-OR 8- BUTTON MESH WALL CONTROLLER
100-240 VAC INPUT
INSTALLATION IN A STANDARD 4x4-INCH JUNCTION BOX

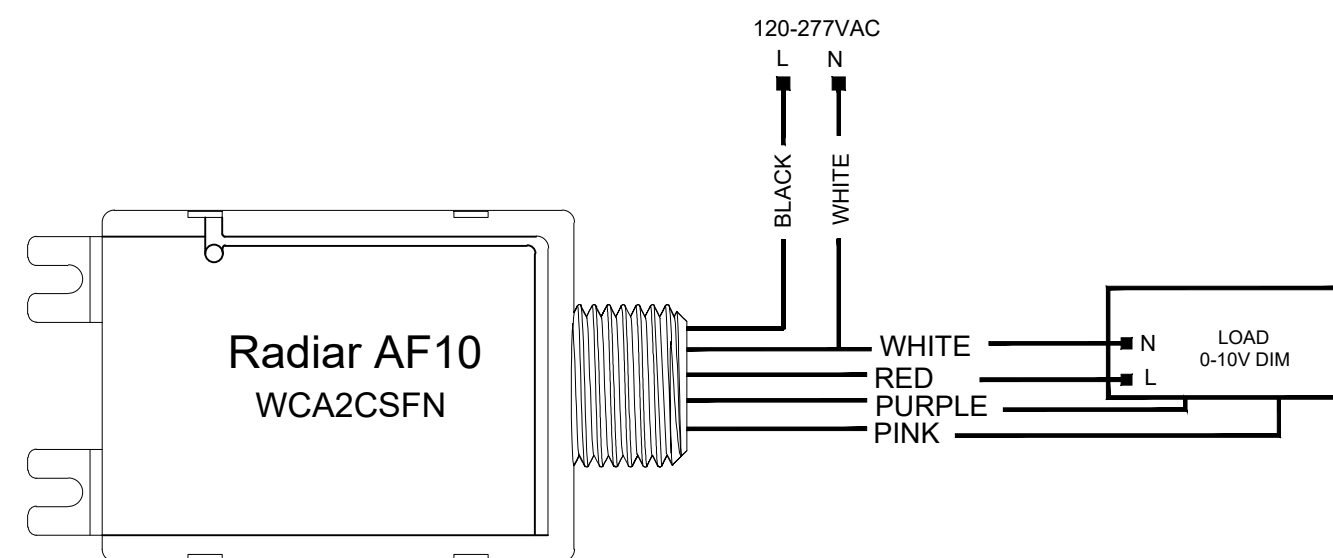


RADIAR AF10

WIRELESS TWO-CHANNEL 0-10 V FIXTURE CONTROLLER
120-277 VAC INPUT
SWITCHED LOAD OUTPUT, 12 VDC AUXILIARY POWER AND 0-10 V SENSOR INPUT
DEVICE IS FIXTURE- OR JUNCTION-BOX MOUNTED.

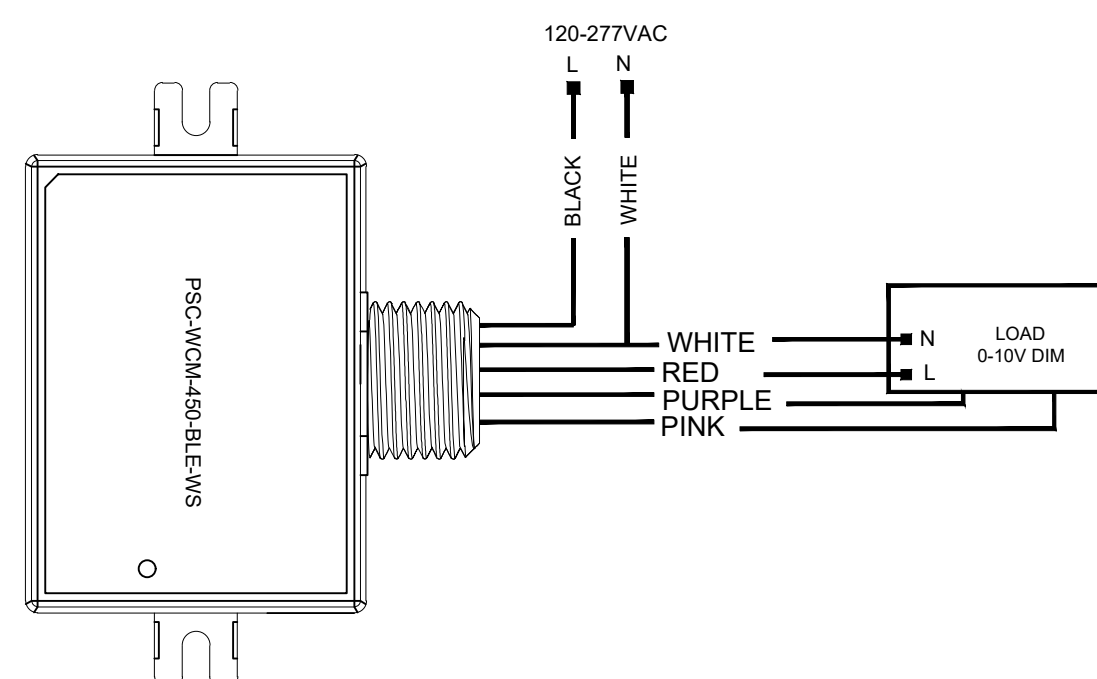


PSC-WCM-450-BLE-WS

WIRELESS TWO-CHANNEL 0-10V ROOM CONTROLLER
120-277 VAC INPUT
SWITCHED LOAD OUTPUT, 12Vdc AUXILIARY POWER AND 0-10V SENSOR INPUT.
DEVICE IS FIXTURE OR JUNCTION BOX MOUNTED

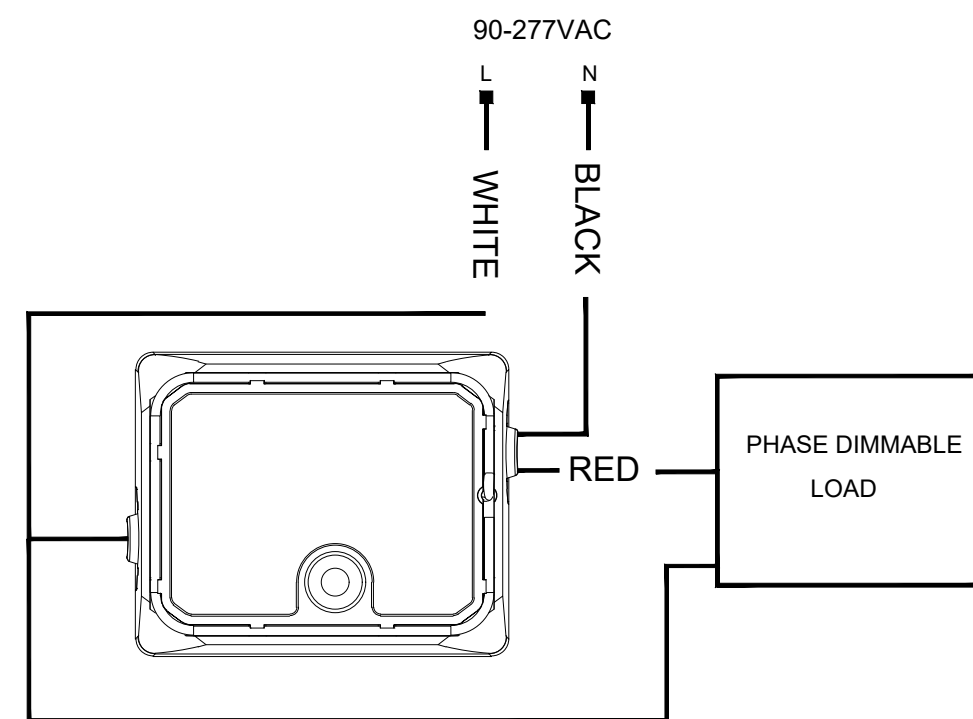


OMNI TED

WIRELESS TRAILING-EDGE DIMMER
90-277 VAC INPUT] UP TO 250 W
PROVIDES WIRELESS ON/OFF AND PHASE-DIMMING CONTROL FOR COMPATIBLE LIGHTING LOADS

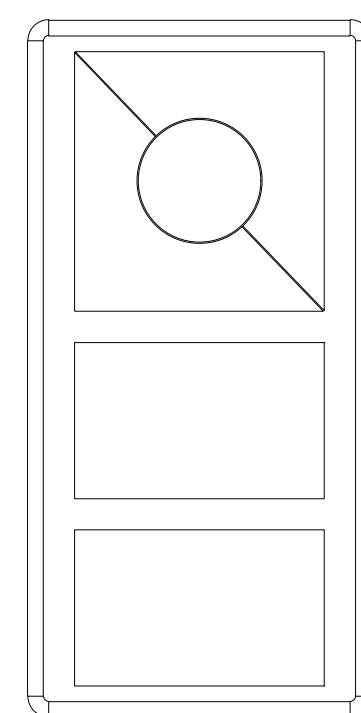


CATRON V

WIRELESS FIVE-BUTTON LIGHTING REMOTE
3 VDV COIN-CELL BATTERY.

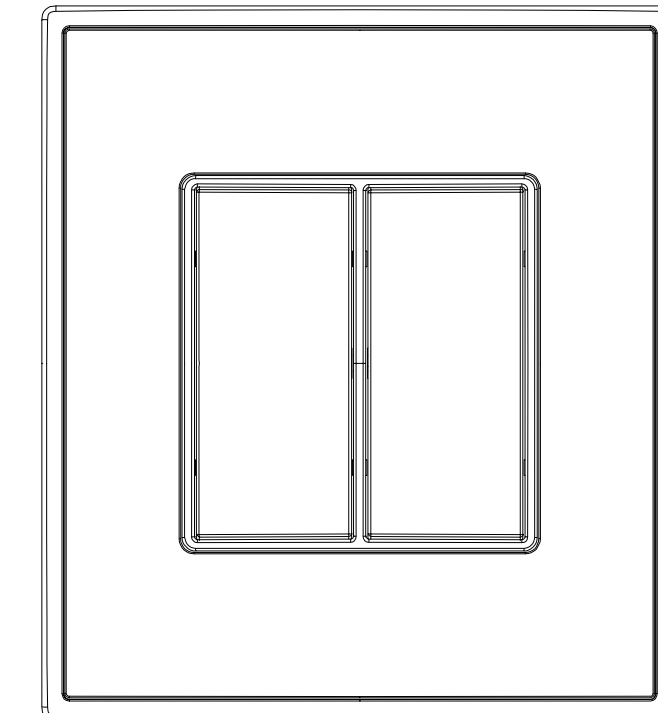


EDRPB

WIRELESS SELF POWERED FOUR-BUTTON WALL SWITCH
KINETIC ENERGY HARVESTING| BATTERY-FREE

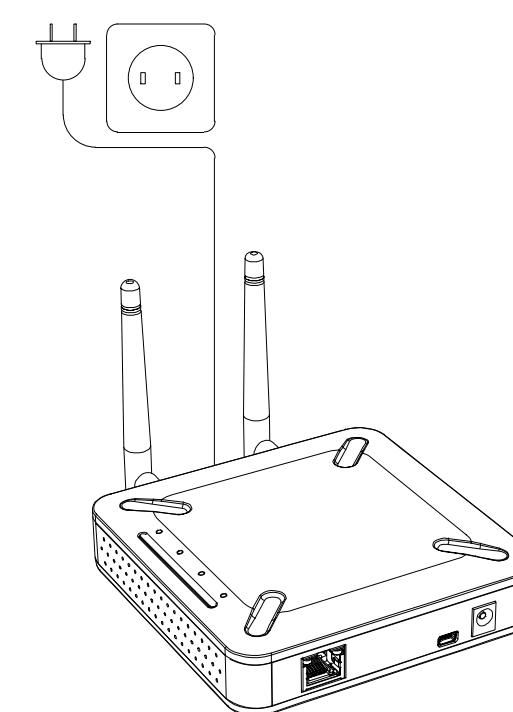


ENOR E

BLE-TO-CLOUD GATEWAY WITH RTC AND ASTRONOMICAL CLOCK
5 VDC INPUT| BLE 5.2| WI-FI| ETHERNET
DEVICE CONNECTS THE LUMOS CONTROLS NETWORK TO THE CLOUD FOR REMOTE MONITORING, CONTROL AND SCHEDULING. PROVIDE 5 VDC POWER AND AN ETHERNET OR WI-FI CONNECTION.

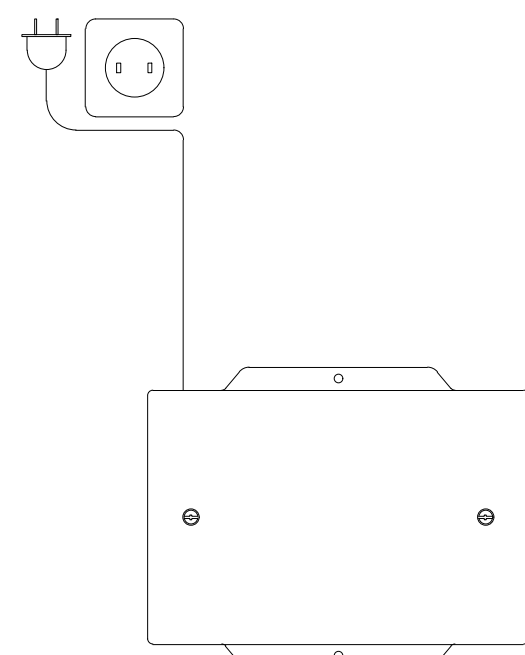


IRIS E

EDGE GATEWAY FOR BMS INTEGRATION
WI-FI| ETHERNET CONNECTIVITY
DEVICE ENABLES TWO-WAY COMMUNICATION BETWEEN LUMOS CONTROLS BLE MESH NETWORKS AND THE BUILDING MANAGEMENT SYSTEM(BMS).
CONNECTS MULTIPLE LUMOS CONTROLS GATEWAYS TO THE BMS THROUGH WI-FI OR ETHERNET.

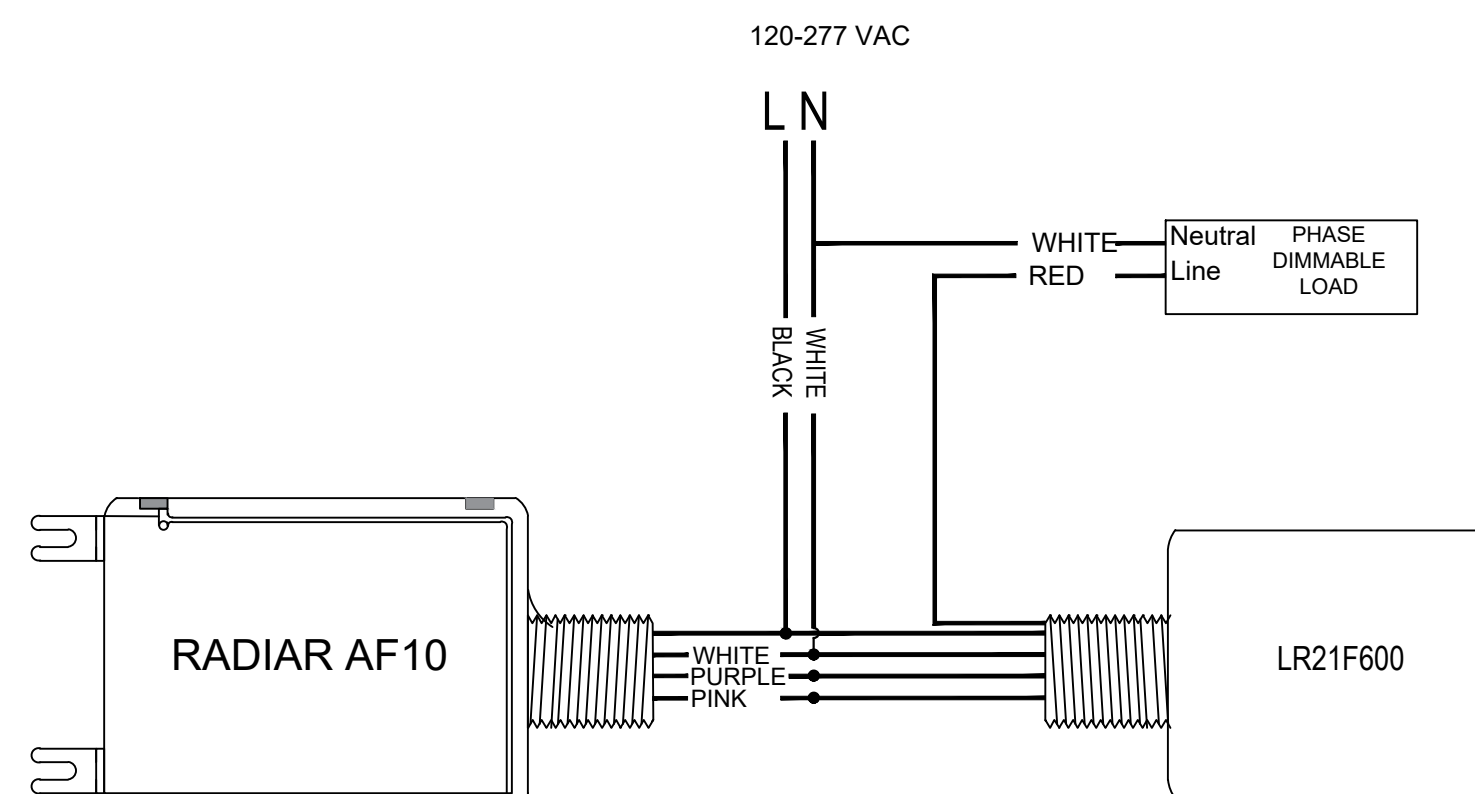


LR21F600

LEADING AND TRAILING EDGE PHASE DIMMER
120-277 Vac | 0-10V CONTROL INPUT
CONTROL PHASE-DIMMABLE LOADS UPTO 600W AT 120V OR 1300W AT 277V

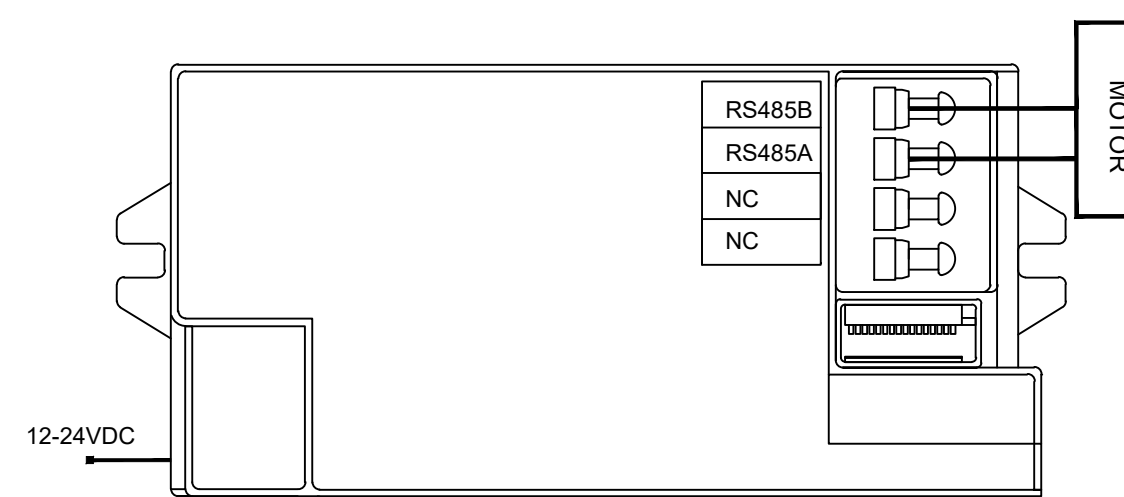

RADIAR SBM

SMART CURTAIN MOTOR CONTROLLER
12-24 VDC , RS485/UART
CONTROLS OPEN,CLOSE,STOP,AND CURTAIN POSITION FOR COMPATIBLE THIRD-PARTY MOTORS.

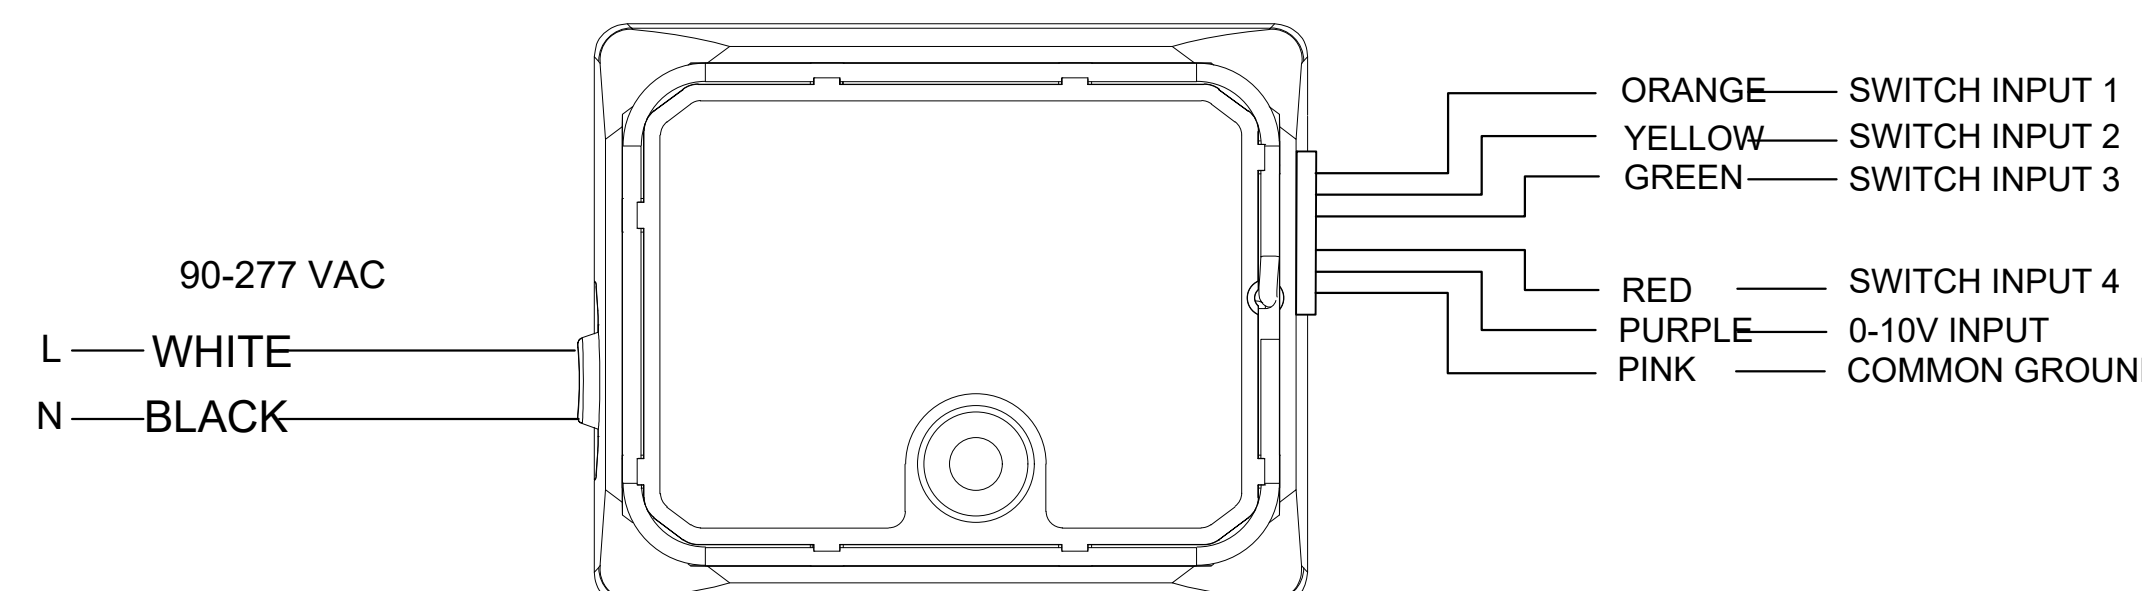

CATRON AI

WIRELESS FOUR-INPUT SWITCH INTERFACE.
90-277Vac INPUT
CONVERTS COMPATIBLE TOGGLE, PUSH-BUTTON, DIMMER OR DRY-CONTACT INPUTS INTO WIRELESS LIGHTING COMMANDS.

NOTE:

1. REFER TO PRODUCT SPECIFICATION SHEETS FOR INSTALLATION, CONFIGURATION, AND ADDITIONAL MOUNTING INFORMATION.
2. ALL LUMOS CONTROLS DEVICES COMMUNICATE AND INTERACT THROUGH BLUETOOTH LOW ENERGY (BLE).